

APP CRS  
**173°**

Rwy Idg  
TDZE  
Apt Elev

**4001**  
**1551**  
**1551**

**RNAV (GPS) RWY 17**

WATONGA RGNL (JWG)

RNP APCH - GPS.

▼

When local altimeter setting not received, use Clinton altimeter setting and increase all

▲ NA


MDA 100 feet; increase LNAV Cat C visibility  $\frac{3}{8}$  SM and Circling Cat C visibility  $\frac{1}{4}$  SM.

MISSED APPROACH: Climbing left turn to 4000 direct ASEHU and hold.

AWOS-3  
**134.175**

VANCE APP CON ★  
**126.75 346.325**

UNICOM  
**122.8 (CTAF) 0**

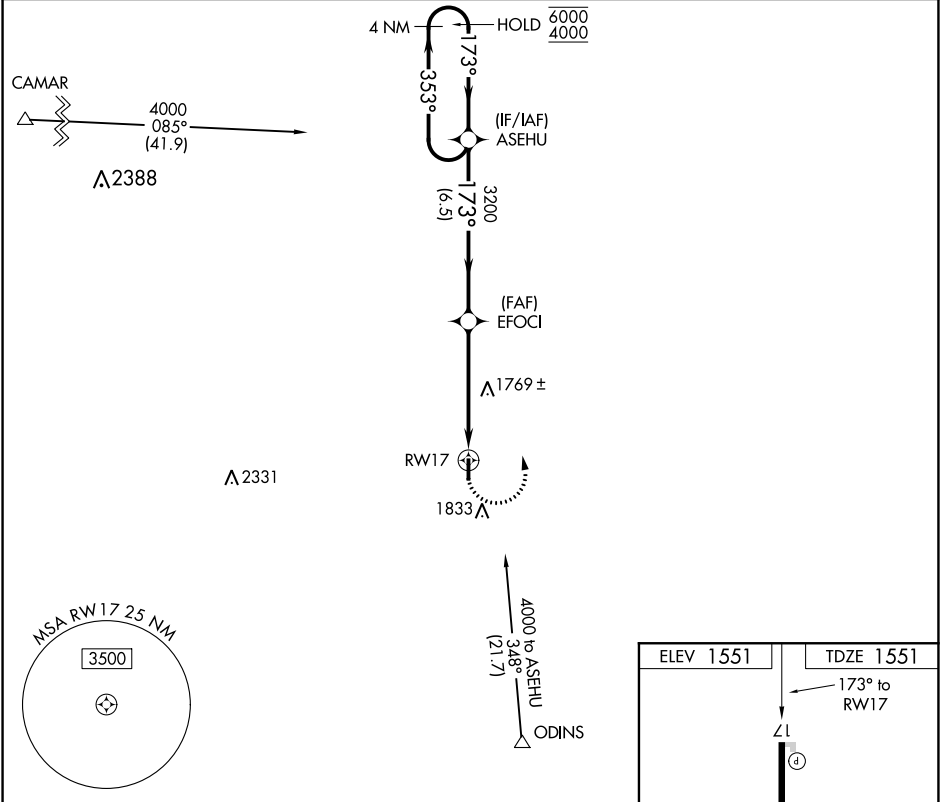

4 NM Holding Pattern ASEHU

6000 ← 353°

4000 → 173°

3200

EFOCI

3.04° TCH 40

RW17

6.5 NM

5 NM

4000 ASEHU

4001 X 60

0.5% UP

35

CATEGORY	A	B	C	D
LNAV MDA	2060-1	509 (600-1)	2060-1 $\frac{3}{8}$ 509 (600-1 $\frac{3}{8}$ )	NA
CIRCLING	2060-1 509 (600-1)	2240-1 689 (700-1)	2240-2 689 (700-2)	NA

MIRL Rwy 17-35 0