V

A

WAAS 4007 Rwy Idg APP CRS CH 45933 TDŹE 820 315° Apt Elev W31A 820 RNP APCH-GPS

## RNAV (GPS) RWY 31 HALLOCK MUNI (HCO)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grafton altimeter setting and increase LPV DA To 1082 feet; increase LNAV/VNAV DA to 1132 feet; increase all MDAs 80 feet and LNAV visibility Cat C  $\frac{3}{8}$  SM, and Circling visibility Cat C  $\frac{1}{4}$  SM. Baro-VNAV and VDP NA when using Grafton altimeter setting.

MISSED APPROACH: Climb to 3300 direct FESNI and hold, continue climb-in-hold to 3300.

AWOS-3 MINNEAPOLIS CENTER UNICOM 126,475 132.15 269.6 122.8 (CTAF) (

1284 €

Λ 1266

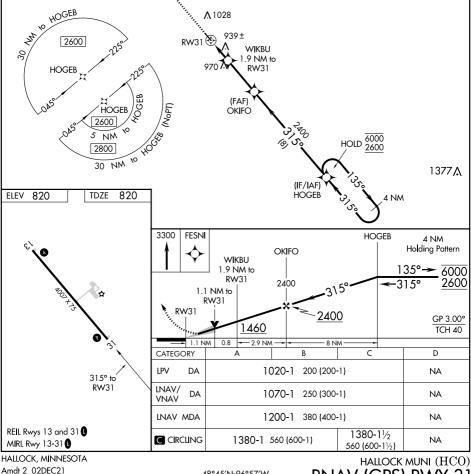

Amdt 2 02DEC21

RNAV (GPS) RWY 31

NC-1, 13 JUL 2023 to 10 AUG 2023