

WAAS CH 50308 W24A	APP CRS 241°	Rwy Idg 5000 TDZE 666 Apt Elev 666
--	------------------------	---


RNAV (GPS) RWY 24




PONTIAC MUNI (PNT)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1014 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ½ SM, Circling Cat C ½ SM. Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
BUCLA and hold.

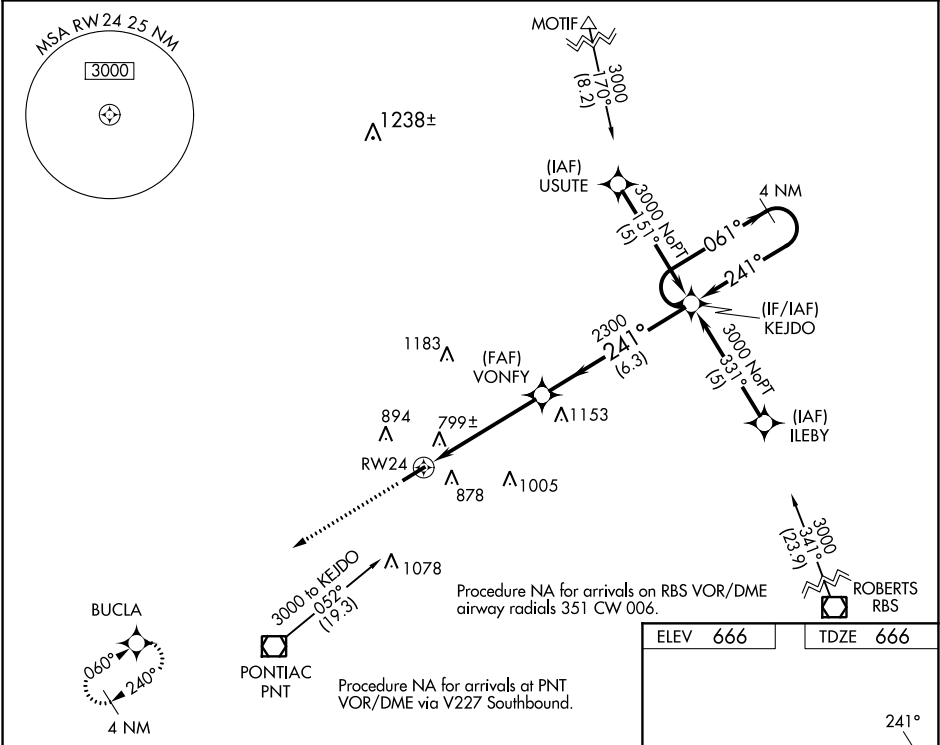AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

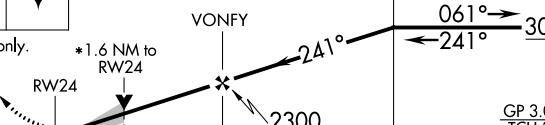

3000	BUCLA				4 NM Holding Pattern	
						
*LNAV only.						
CATEGORY	A	B	C	D		
LPV DA	916-1	250 (300-1)		NA		
LNAV/VNAV DA	1139-1¾	473 (500-1¾)		NA		
LNAV MDA	1220-1	554 (600-1)	1220-1½ 554 (600-1½)	NA		
CIRCLING	1220-1	554 (600-1)	1320-1¾ 654 (700-1¾)	NA		

