

APP CRS	Rwy Idg	5299
069°	TDZE	1722
	Apt Elev	1723

RNAV (GPS) RWY 7

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)



RNP APCH-GPS.

▼

Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Dunkirk altimeter setting: increase all MDAs 200 feet and visibility LNAV Cats C/D ½ SM, Circling Cat C ½ SM and Circling Cat D ¾ SM. Rwy 7 Straight-in/Circling and Circling to Rwy 13/31 NA at night.

MISSED APPROACH: Climb to 4000 direct OYNEM and hold.

AWOS-3PT 118.425	BUFFALO APP CON ★ 126.05	UNICOM 122.975 (CTAF) ①
---------------------	-----------------------------	----------------------------

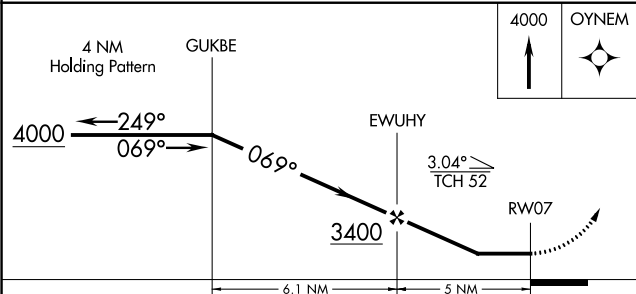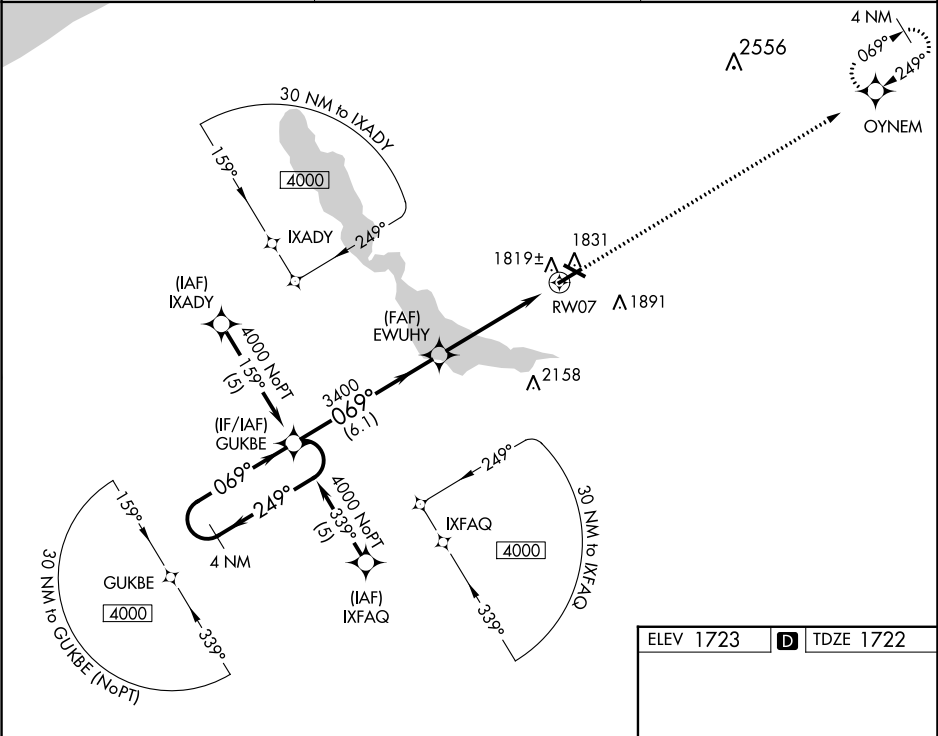

ELEV 1723 D TDZE 1722

This section provides a detailed view of the 1790 holding pattern and the approach path. Key features include:

- Holding Pattern:** 4499 X 100, 5299 X 100.
- Angles:** 13°, 35°, 069°.
- Distances:** 13, 5, 13.
- Obstacles:** 1790, 1723, 1722.
- Navigation Aids:** REIL Rwy 31, MIRL Rwy 13-31, HIRL Rwy 7-25.

CATEGORY	A	B	C	D
LNAV MDA	2120-1	398 (400-1)	2120-1¼	398 (400-1¼)
CIRCLING	2200-1	477 (500-1)	2260-1½	2340-2
			537 (600-1½)	617 (700-2)