

APP CRS	Rwy Idg	9509
238°	TDZE	170
	Apt Elev	173

RNAV (RNP) Z RWY 24
BRADLEY INTL (BDL)

BRADLEY INTL (BDL)

T For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required.
For inop ALS, increase all Cats visibility to 1½ SM.

MALSR



MISSED APPROACH: Climb to 3000 on track 238° to PENNA and hold.

D-ATIS
118.15


BRADLEY APP CON		
123.95	290.55	(061°-240°)
125.35	281.5	(241°-060°)

BRADLEY TOWER
120.3 351.8

GND CON
121.9 348.6

CLNC DEL
121.75 322.3


CPDLC

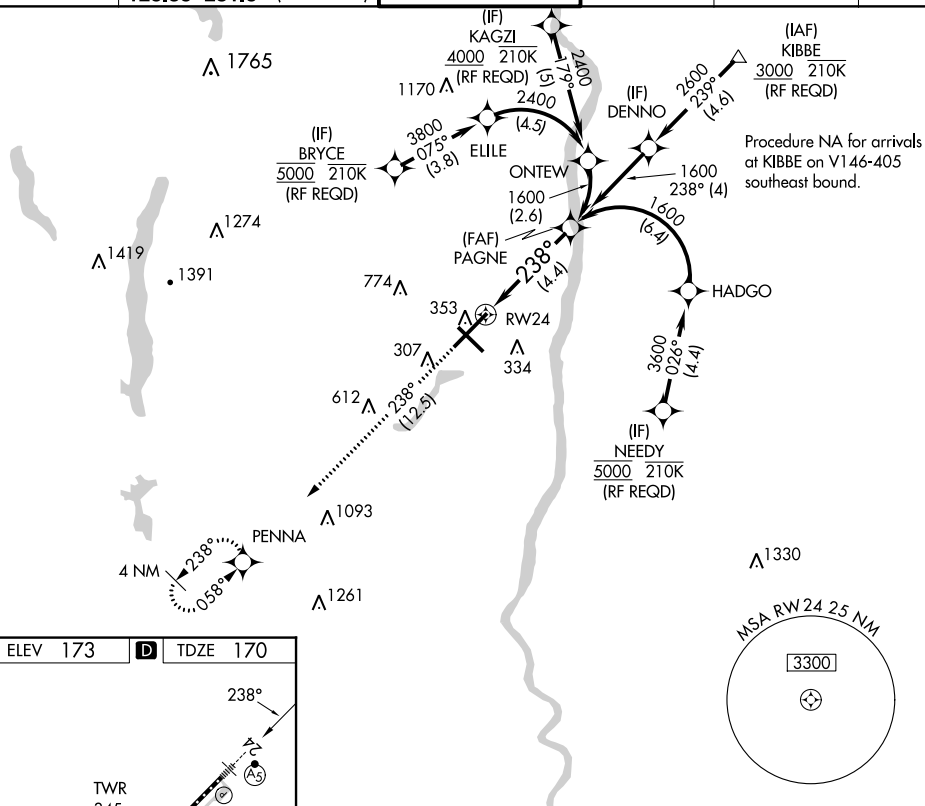

ELEV	173	D	TDZE	170
------	-----	----------	------	-----

D

D	TDZE 170
---	----------




3000
↑
tr 238°



VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

PAGNE
1600

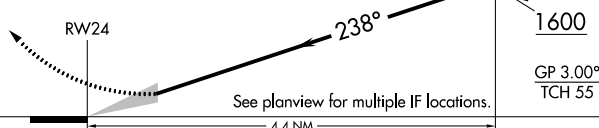

CATEGORY
RNP 0.30 DA

A

B
622/60

C

(500-1¼)

AUTHORIZATION REQUIRED

TDZ/CL Rwy 6 and 24
HIRL Rwy 6-24 and 15-33
REIL Rwy 6 and 15