

WAAS
CH **93909**
W26A

APP CRS
263°

Rwy Idg
TDZE
5489
Apt Elev
5515

RNAV (GPS) RWY 26

COLORADO AIR AND SPACE PORT (CFO)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 48°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.

MALSRL

MISSED APPROACH: (Do not exceed 200K until LIMEX) Climb to 6100 then climbing left turn to 7600 direct LIMEX and hold.

ATIS 119.025	DENVER APP CON 128.25 371.95	SPACE PORT TOWER ★ 120.2 (CTAF) 0	GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
------------------------	--	---	-------------------------	--------------------------	--	-------------------------

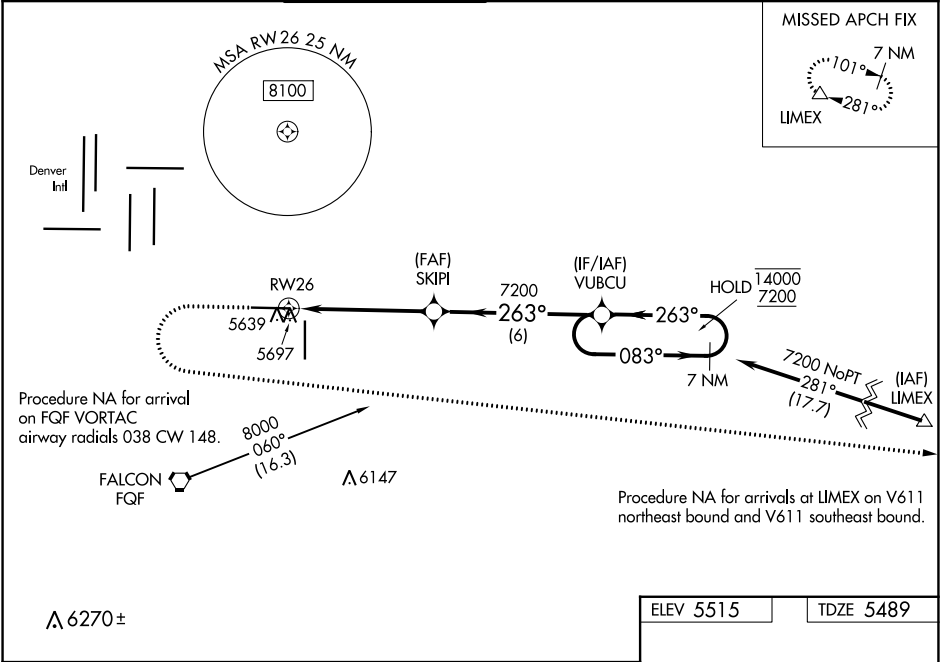

6100 7600 LIMEX

*LNAV only

*1.4 NM to RW26

SKIPI

VUBCU

7 NM Holding Pattern

RW26

7200

14000 7200

GP 3.00° TCH 50

1.4 NM

3.8 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	5689-½ 200 (200-½)			
LNAV/VNAV DA	5858-¾ 369 (400-¾)			
LNAV MDA	5960-½ 471 (500-½)	5960-1 471 (500-1)		
CIRCLING	6000-1 485 (500-1)	6100-1½ 585 (600-1½)	6300-2½ 785 (800-2½)	

ELEV 5515 TDZE 5489

REIL Rwy 8 and 17

HIRL Rwy 8-26

MIRL Rwy 17-35

5538

8002 X 100

0.5% UP

0.4% DOWN

AS

△ 5559±

26

0.5% UP

0.5% DOWN

35

263° to RW26