

APP CRS  
233°

Rwy Idg  
TDZE  
798

Apt Elev  
802

RNAV (GPS) RWY 23

LENAWEE COUNTY (ADG)

RNP APCH - GPS


▼

⚠

Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ann Arbor Muni altimeter setting: increase all MDA 80 feet and visibility LNAV Cats C/D and Circling Cats C/D ¼ SM. Circling NA to Rwys 11 and 29.

MISSED APPROACH: Climb to 3000 direct OBIHI and hold.

|                 |                                 |                          |
|-----------------|---------------------------------|--------------------------|
| ASOS<br>118.375 | TOLEDO APP CON<br>134.35 317.55 | UNICOM<br>122.8 (CTAF) 0 |
|-----------------|---------------------------------|--------------------------|

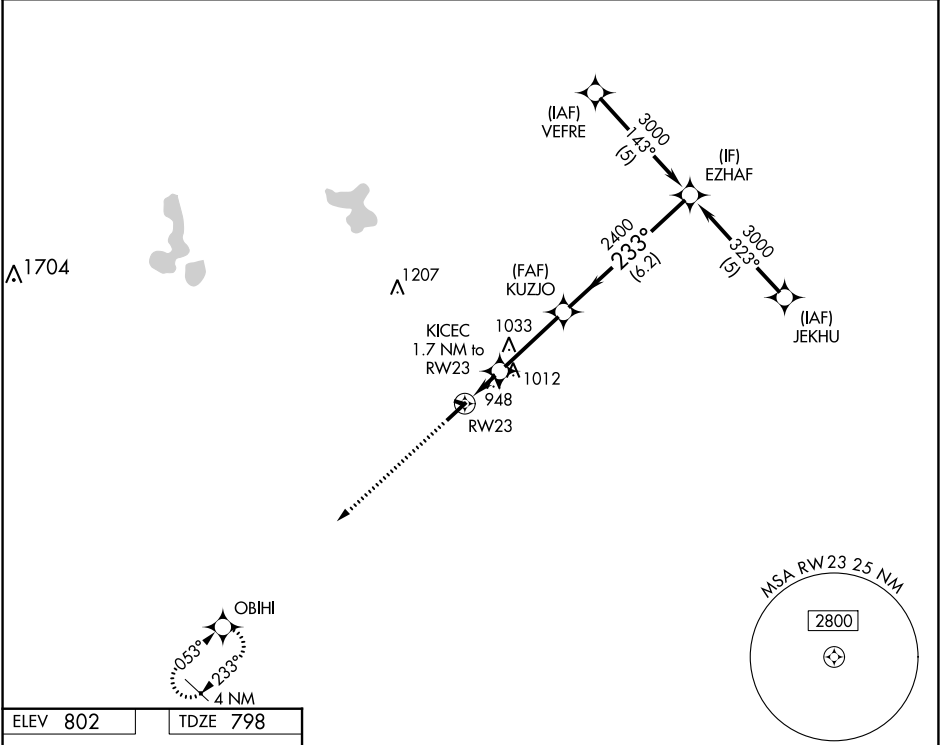

ELEV 802

TDZE 798

3000

OBIHI

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 32).

1779 X 150

0.3% UP

5001 X 100

233° to RW23

HIRL Rwy 5-23 0

REIL Rwy 5 0

3000

EZHAF

KUZJO

2400

KICEC

1.7 NM to RW23

1380

3.04° TCH 45

1.7 NM

3.1 NM

6.2 NM

| CATEGORY | A                     | B                     | C                       | D                       |
|----------|-----------------------|-----------------------|-------------------------|-------------------------|
| LNAV MDA | 1260-1                | 462 (500-1)           | 1260-1⅔<br>462 (500-1⅔) | 1260-1½<br>462 (500-1½) |
| CIRCLING | 1300-1<br>498 (500-1) | 1320-1<br>518 (600-1) | 1340-1½<br>538 (600-1½) | 1440-2<br>638 (700-2)   |