

APP CRS	Rwy Idg	8012
076°	TDZE	729
	Apt Elev	729

RNAV (RNP) Y RWY 7R  
GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.

**T** For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to 1¼. For inop ALS, increase RNP 0.15 all Cats visibility to 1½. For inop ALS, increase RNP 0.30 all Cats visibility 1¾.

MALSR



**MISSED APPROACH:** Climb to 3700 on the RNAV missed approach route to PROOT and hold.

D-ATIS  
126.4


MILWAUKEE APP CON  
126.5 307.0

MILWAUKEE TOWER  
124.575 269.05


GND CON  
121.8 263.125

CLNC DEL  
**120.8**

CPDLC

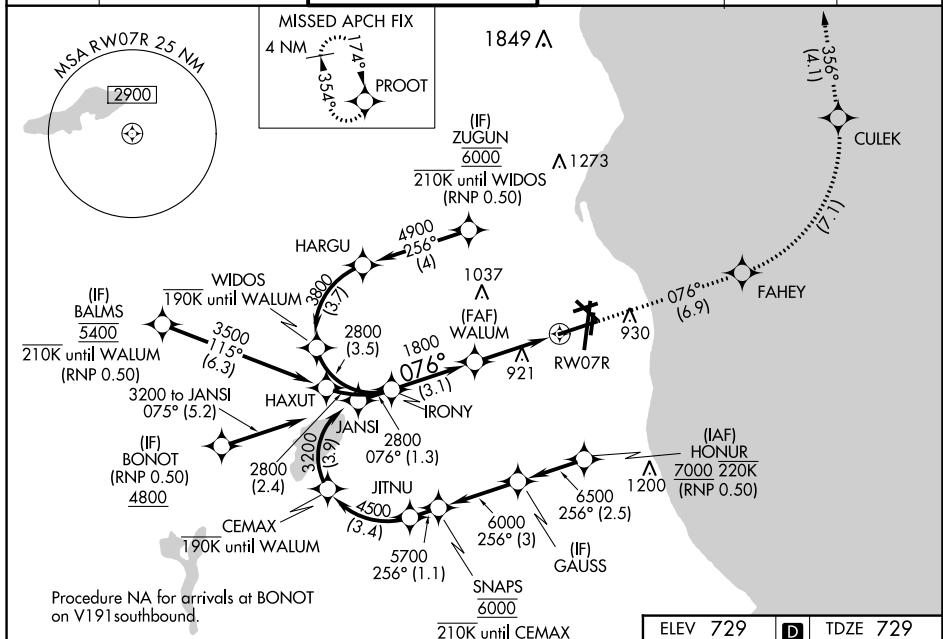


See planview for multiple IF locations.

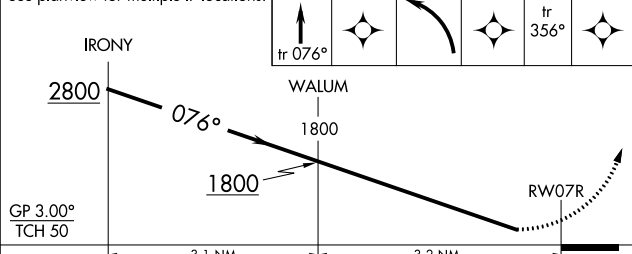

CATEGORY	A	B	C	D
RNP 0.10 DA		1119/45	390 (400- $\frac{7}{8}$ )	
RNP 0.15 DA		1203/60	474 (500-1 $\frac{1}{4}$ )	
RNP 0.30 DA		1255-1 $\frac{3}{8}$	526 (600-1 $\frac{1}{2}$ )	

**AUTHORIZATION REQUIRED**

ELEV 729		TDZE 729
----------	---	----------

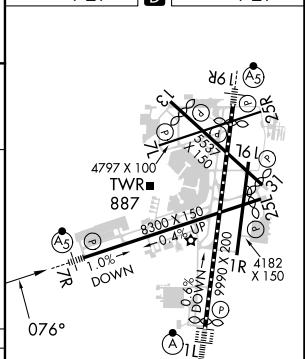

TDZ/CL Rwy 1L  
REIL Rwy 1R, 7L,  
13, 25L, 25R, and 31  
HIRL Rwy 1L-19R and 7R-25L  
MIRL Rwy 1R-19L, 13-31 and