

APP CRS
292°

Rwy Idg
TDZE
Apt Elev

3600
1607
1607

RNAV (GPS) RWY 29

HARVEY MUNI (5H4)

RNP APCH.


▼

▲ NA

Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Baro-VNAV NA when using Devil's Lake altimeter setting. When local altimeter setting not received, use Devil's Lake altimeter setting: increase LNAV/VNAV DA to 2246 feet and visibility LNAV/VNAV all Cats ½ SM; increase all MDA 140 feet and visibility LNAV and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 3400 direct
NUTFO and hold.

AWOS-3 118.825	MINNEAPOLIS CENTER 135.25 256.7	UNICOM 122.8 (CTAF) 0
-------------------	------------------------------------	--------------------------

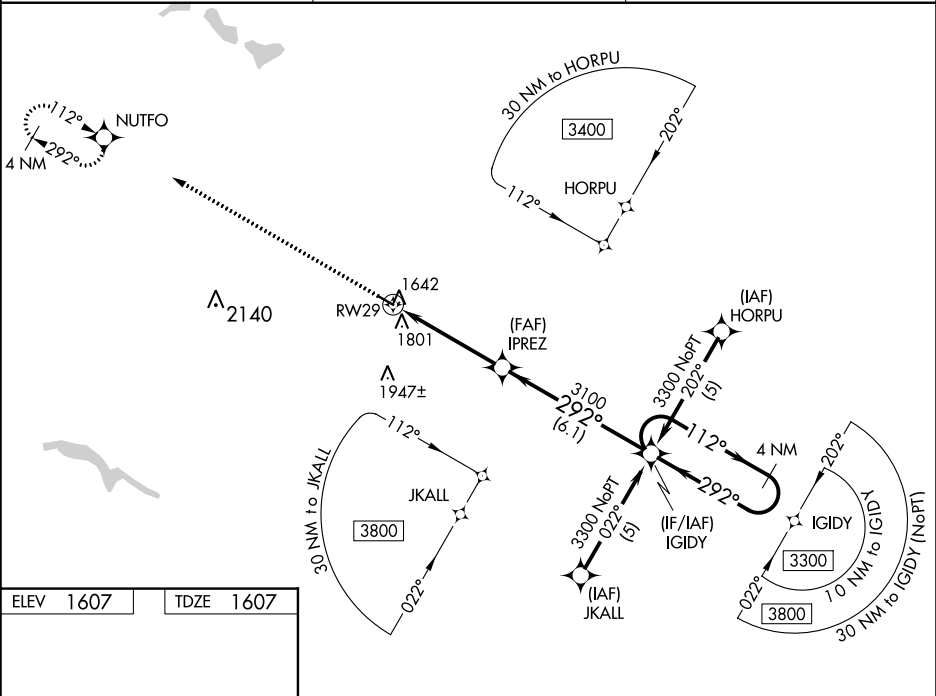

MRL Rwy 11-29

3400

NUTFO

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 27).

IPREZ

3100

IGIDY

3300

4 NM Holding Pattern

112°→

←292°

GP 3.00°

TCH 40

CATEGORY

A

B

C

D

LNAV/VNAV DA

2119-1¾

512 (600-1¾)

NA

LNAV MDA

2100-1

493 (500-1)

2100-1¼
493 (500-1¼)

NA

CIRCLING

2120-1

513 (600-1)

2300-2
693 (700-2)

NA