

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>40017</b><br><b>W10A</b> | APP CRS<br><b>100°</b> | Rwy Idg <b>9014</b><br>TDZE <b>421</b><br>Apt Elev <b>421</b> |
|--|------------------------|---|

RNAV (GPS) Z RWY 10  
SYRACUSE HANCOCK INTL (SYR)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3200 direct STODA and hold, continue climb-in-hold to 3200.

|                        |  |                                      |                               |                                   |
|------------------------|--|--------------------------------------|-------------------------------|-----------------------------------|
| ATIS<br><b>124,225</b> | SYRACUSE APP CON<br><b>126.125 269.125</b> | SYRACUSE TOWER<br><b>120.3 239.0</b> | GND CON<br><b>121.7 348.6</b> | CLNC DEL<br><b>125.05 257.775</b> |
|------------------------|--|--------------------------------------|-------------------------------|-----------------------------------|

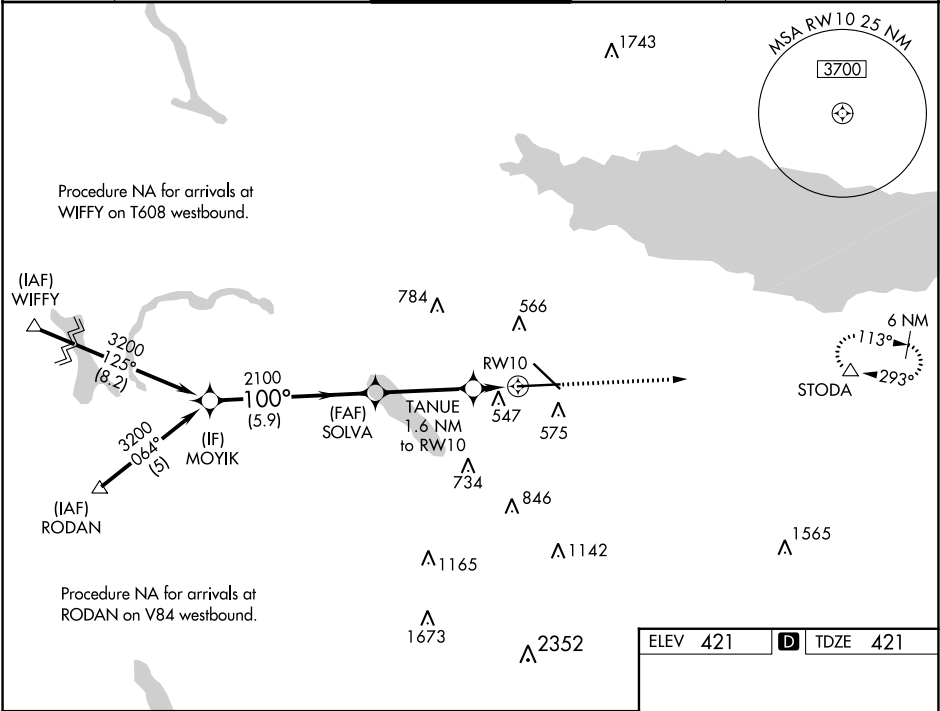

|                      |                      |                      |                         |                            |  |                                |            |
|----------------------|----------------------|----------------------|-------------------------|----------------------------|--|--------------------------------|------------|
| MOYIK<br><u>3200</u> |                      | SOLVA<br>2100        |                         | TANUE<br>1.6 NM<br>to RW10 |  | 3200<br>↑                      | STODA<br>△ |
| GP 3.00°<br>TCH 55°  |                      | 2100                 |                         | *980                       |  | *LNAV only<br>*1 NM<br>to RW10 |            |
| 5.9 NM               |                      | 3.5 NM               |                         | 0.6 NM                     |  | 1 NM                           |            |
| CATEGORY             | A                    | B                    | C                       | D                          |  |                                |            |
| LPV DA#              | 621/24 200 (200-½)   |                      |                         |                            |  |                                |            |
| LNAV/<br>VNAV DA     | 846/40 425 (500-¾)   |                      |                         |                            |  |                                |            |
| LNAV MDA             | 800/24 379 (400-½)   |                      |                         | 800/35 379 (400-¾)         |  |                                |            |
| CIRCLING             | 900-1<br>479 (500-1) | 920-1<br>499 (500-1) | 1020-1½<br>599 (600-1½) | 1180-2½<br>759 (800-2½)    |  |                                |            |

ELEV 421 TDZE 421

TDZ/CL Rwy 28  
HIRL Rwy 10-28 and 15-33

NE-2, 13 JUL 2023 to 10 AUG 2023

NE-2, 13 JUL 2023 to 10 AUG 2023