

APP CRS  
293°

Rwy Idg  
3198

TDZE  
604

Apt Elev  
604

RNAV (GPS) RWY 29

OCONTO/J DOUGLAS BAKE MUNI (OCQ)


▼

NA

Use Menominee altimeter setting; when not received, use Green Bay altimeter setting and increase all MDA 40 feet; increase LNAV/Circling Cat C visibility ¼ mile. Procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH:  
Climb to 3200 direct WOBVE and hold.

AWOS-3 120.925	MNM AWOS-3PT 121.45	GREEN BAY APP CON ★ 120.3 338.2	UNICOM 122.8 (CTAF) 0
-------------------	------------------------	------------------------------------	--------------------------

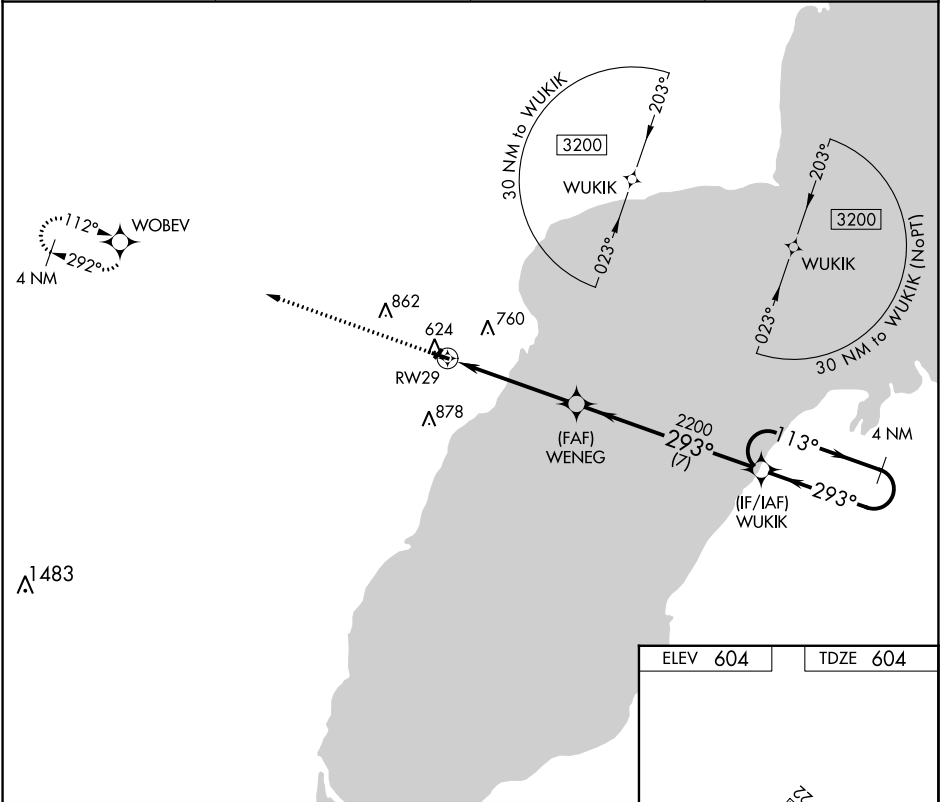

3200 WOBVE

WUKIK

4 NM Holding Pattern

WENEG

2200

3.00% TCH 40

4.9 NM

7 NM

CATEGORY	A	B	C	D
LNAV MDA	1120-1	516 (600-1)	1120-1⅜ 516 (600-1⅜)	NA
CIRCLING	1120-1 516 (600-1)	1220-1 616 (700-1)	1260-1¾ 656 (700-1¾)	NA

ELEV 604

TDZE 604

REIL Rwy 11 and 29 0

MIRL Rwy 11-29 0