

SIoux CITY, IOWA

AL-395 (FAA)

22223


WAAS CH 57911 W13A	APP CRS 133°	Rwy Idg TDZE Apt Elev	9002 1095 1098
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13


SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUx)

RNP APCH-GPS. <div><div>▼</div><div>▲</div></div> Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cat E visibility to 1½ SM.	MALS <div><div>⬤</div><div>⬤</div><div>⬤</div></div>	MISSED APPROACH: Climb to 3900 direct WAVUK and hold.
---	---	---

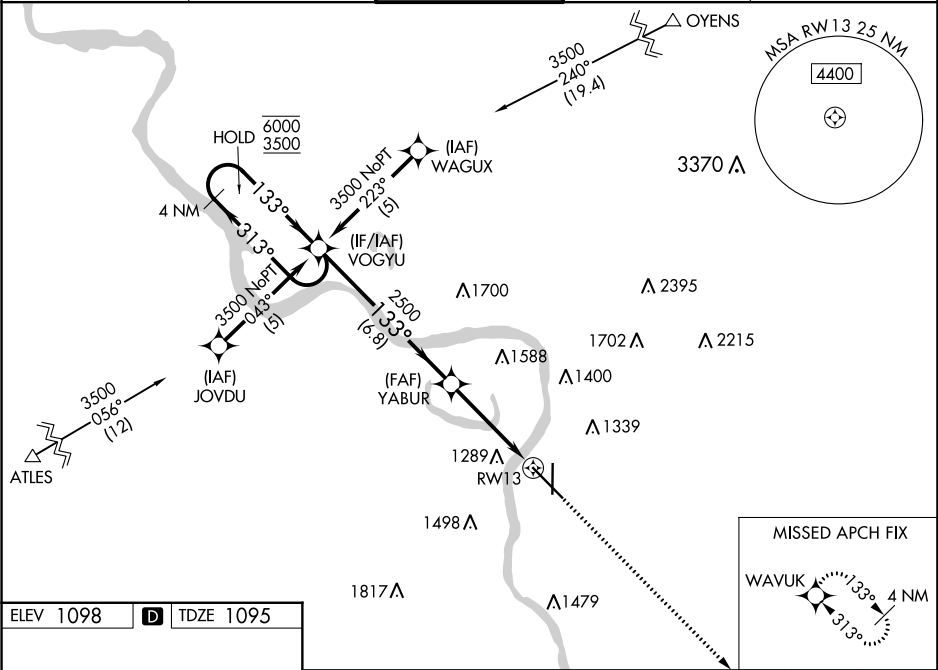



ATIS 119.45 270.8	SIoux CITY APP CON ★ 124.6 307.0	SIoux CITY TOWER ★ 118.7 (CTAF) 0 254.3	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	---	-------------------------------	-------------------------

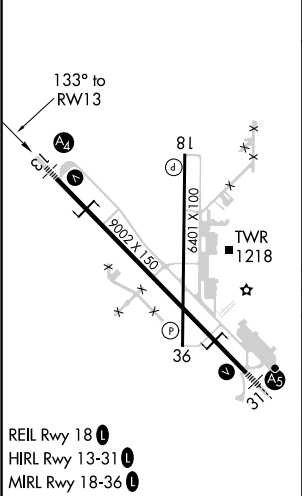

ELEV 1098	D	TDZE 1095
-----------	----------	-----------



REIL Rwy 18 **1**
HIRL Rwy 13-31 **1**
MIRL Rwy 18-36 **1**

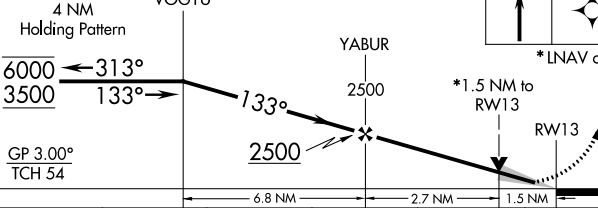VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).					3900	WAVUK
4 NM Holding Pattern						
					*LNAV only.	
GP 3.00° TCH 54						
CATEGORY	A	B	C	D	E	
LPV DA	1295/40 200 (200-¾)					
LNAV/ VNAV DA	1582/60 487 (500-1¼)					
LNAV MDA	1620/40	525 (600-¾)	1620-1¼ 525 (600-1¼)			
 CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1¾ 602 (700-1¼)	1860-2½ 762 (800-2½)	2000-3 902 (1000-3)	

SIoux CITY, IOWA
Orig-G 11AUG22

SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUx)
42°24'N-96°23'W
RNAV (GPS) RWY 13

NC-3, 13 JUL 2023 to 10 AUG 2023

NC-3, 13 JUL 2023 to 10 AUG 2023