


WAAS CH 93609 W05A	APP CRS 050°	Rwy Idg 11981 TDZE 815 Apt Elev 815
----------------------------------------	------------------------	----------------------------------------------------------------

RNAV (GPS) RWY 5

FORT WAYNE INTL (FWA)

<div><div>▼ ASR</div><div>For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat C/D/E visibility to 1¾ SM.</div></div>	<div>ALSF-2</div> <div><div><div>ⓘ</div><div>ⓐ</div></div><div><div>▬</div><div>▬</div><div>▬</div></div></div>	<div>MISSED APPROACH: Climb to 3000 direct SLYDR and hold.</div>	<div>ATIS</div> <div>121.25 360.825</div>	<div>FORT WAYNE APP CON</div> <div>127.2 284.6</div>	<div>FORT WAYNE TOWER</div> <div>119.1 269.325</div>	<div>GND CON</div> <div>121.9 348.6</div>	<div>CLNC DEL</div> <div>124.75</div>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------	-------------------------------------------	------------------------------------------------------	------------------------------------------------------	-------------------------------------------	---------------------------------------

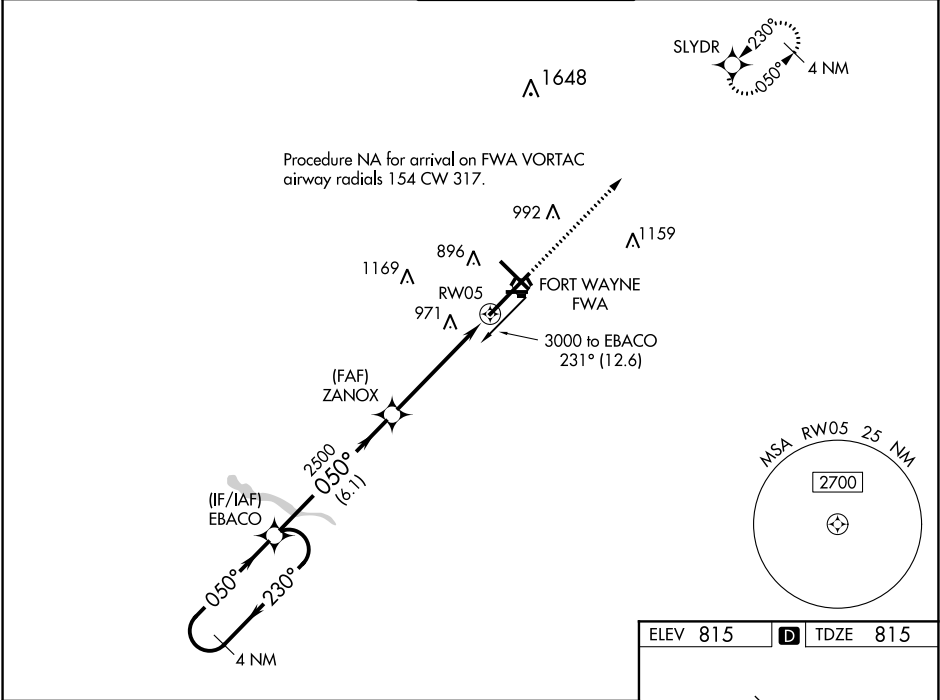

<div>4 NM Holding Pattern</div> <div>EBACO</div> <div>ZANOX</div> <div>2500</div> <div>2500</div> <div>6.1 NM</div> <div>3.7 NM</div> <div>1.4 NM</div> <div>GP 3.00° TCH 55°</div> <div>3000</div> <div>230°</div> <div>050°</div> <div>050°</div> <div>* 1.4 NM to RW05</div> <div>RW05</div> <div>* LNAV only.</div> <div>3000</div> <div>SLYDR</div>							
CATEGORY		A	B	C	D	E	
LPV	DA	1065/18 250 (300-½)					
LNAV/ VNAV	DA	1275/60 460 (500-¼)					
LNAV	MDA	1300/24	485 (500-½)	1300/50 485 (500-1)			
CIRCLING		1300-1	485 (500-1)	1420-1¾ 605 (700-1¾)	1520-2¼ 705 (800-2¼)	1520-2½ 705 (800-2½)	

