




APP CRS	Rwy Idg	<b>12000</b>
<b>259°</b>	TDZE	<b>10</b>
	Apt Elev	<b>13</b>

RNAV (RNP) RWY 26L  
DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH, RF required.		MALSF	MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to IAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.
	For uncompensated Baro-VNAV systems, procedure NA		
	NA below 15°C (58°F) or above 53°C (128°F).		

D-ATIS <b>127.9 251.15</b>	HCF APPROACH <b>118.3 269.0</b>	HONOLULU TOWER <b>118.1 257.8</b> <b>123.9 273.575</b> (Rwy 8R/26L)	GND CON <b>121.9 348.6</b>	CLNC DEL <b>121.4 281.4</b>
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------

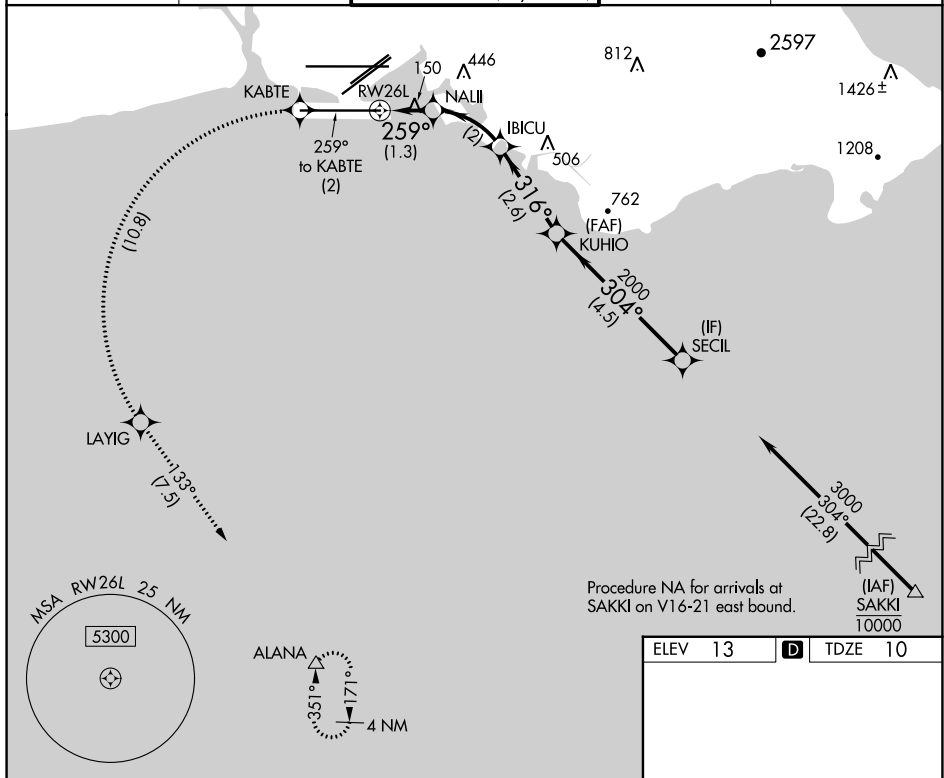

3000 ↑ tr 259°	KABTE ✱	LAYIG ✱	tr 133° △	ALANA	SECL
CATEGORY	A	B	C	D	
RNP 0.15 DA	260-3/4		250 (300-3/4)		
AUTHORIZATION REQUIRED					

