


WAAS CH <b>82319</b> <b>W31A</b>	APP CRS <b>310°</b>	Rwy Idg TDZE Apt Elev	<b>7901</b> <b>3601</b> <b>3607</b>
--	------------------------	-----------------------------	---


**RNAV (GPS) Y RWY 31**  
RICK HUSBAND AMARILLO INTL (AMA)

<b>⚠</b> DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting: increase DA to 4004 and all visibilities 5/8 mile; increase all MDA 160 feet and visibility Cat C and D 1/2 mile. Baro-VNAV and VDP NA when using Borger altimeter setting.	<b>MISSED APPROACH:</b> Climb to 6100 direct MOVEO and on track 317° to LANIT and hold.
--	---

ATIS <b>118.85 350.3</b>	AMARILLO APP CON★ <b>119.5 307.0</b>	AMARILLO TOWER★ <b>118.3 (CTAF) 257.9</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>121.65 239.275</b>	UNICOM <b>122.95</b>
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

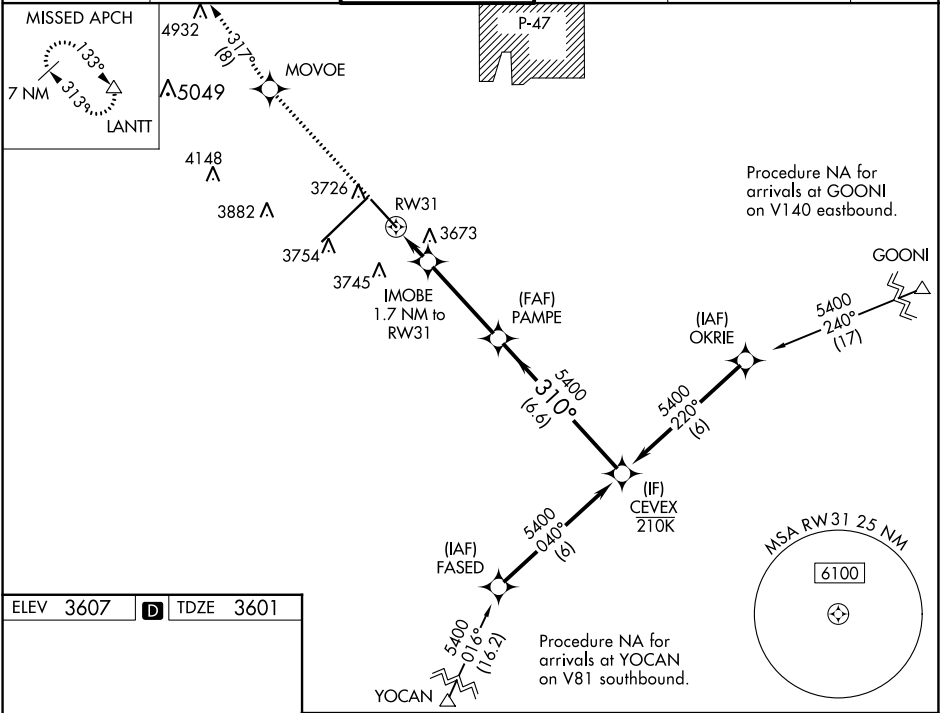

ELEV <b>3607</b>	<b>D</b>	TDZE <b>3601</b>
------------------	----------	------------------

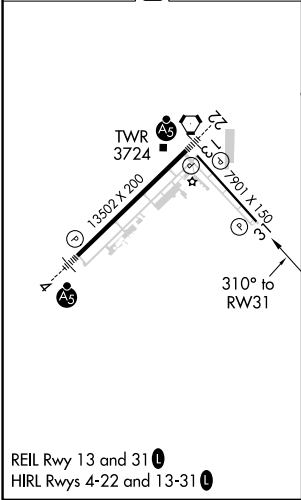

6100	MOVEO	tr 317°	LANIT
*LNAV only.			
IMOBE 1.7 NM to RWY31			
*4180			
RWY31			
PAMPE 5400			
CEVEX 5400			
GP 3.04° TCH 52			
CATEGORY			
LPV DA			
LNAV/VNAV DA			
LNAV MDA			
CIRCLING			