


WAAS CH 65740 W24A	APP CRS 236°	Rwy Idg 6001 TDZE 4237 Apt Elev 4265
--	------------------------	---

RNAV (GPS) RWY 24

SILVER SPRINGS (SPZ)

<div><div><div>▼</div><div>⚠ NA</div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Fallon NAS (Van Voorhis Fld) altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting.</div></div>	<div>MISSED APPROACH: Climb to 6900 then climbing left turn to 9900 direct HZN VORTAC and hold, continue climb-in-hold to 9900. *Missed approach requires minimum climb of 315 feet per NM to 6900.</div>
---	---

AWOS-2 120.475	KNFL ATIS* 370.925	NAVY FALLON APP CON 120.85 360.2	CTAF 122.90
--------------------------	------------------------------	--	-----------------------

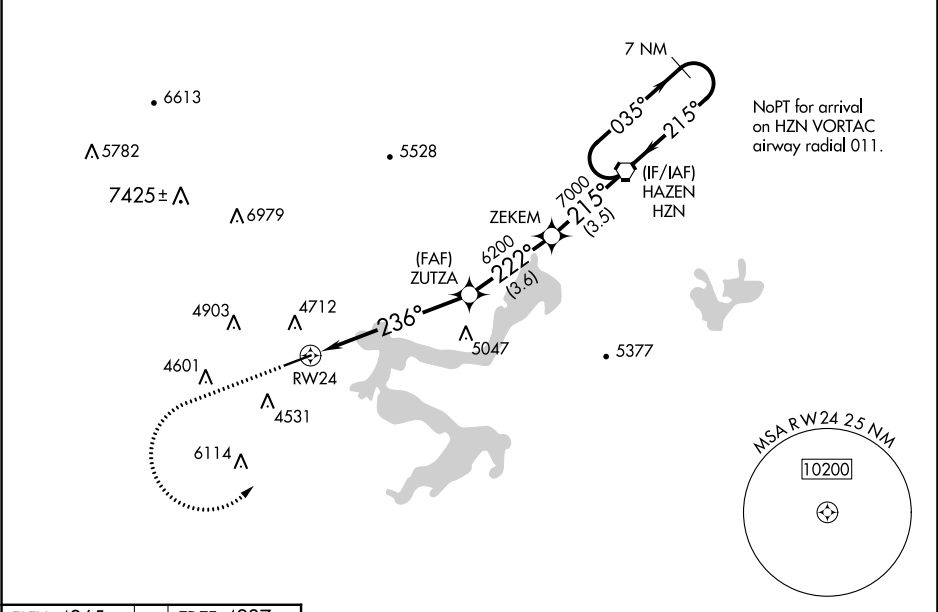

ELEV 4265	TDZE 4237	<div><div>6900</div><div>9900</div><div>HZN</div></div>	<div><div>HAZEN</div><div>HZN</div></div>	7 NM Holding Pattern
<div><div><div>6001 X 75</div><div>0.8% UP</div><div>236°</div></div><div><div>6114</div><div>4601</div><div>4903</div><div>7425±</div><div>5782</div><div>6613</div><div>5528</div><div>5047</div><div>5377</div><div>6979</div><div>4712</div><div>4531</div><div>4601</div><div>6114</div></div></div>	<div><div><div>6200</div><div>7000</div><div>8000</div></div><div><div>236°</div><div>222°</div><div>215°</div><div>035°</div></div><div><div>6.1 NM</div><div>3.6 NM</div><div>3.5 NM</div></div></div>	<div><div>6200</div><div>7000</div><div>8000</div></div> <div><div>GP 3.00°</div><div>TCH 40</div></div>		
CATEGORY	A	B	C	D
LPV DA*	4593-1¼	356 (400-1¼)		NA
LPV DA	5007-3	770 (800-3)		NA
LNAV/VNAV DA	5209-4	972 (1000-4)		NA
LNAV MDA	5280-1¼ 1043 (1100-1¼)	5280-1½ 1043 (1100-1½)	5280-3 1043 (1100-3)	NA
CIRCLING	5280-1¼ 1015 (1100-1¼)	5620-1½ 1355 (1400-1½)	6040-3 1775 (1800-3)	NA

MIRL Rwy 6-24
REIL Rws 6 and 24