

WAAS CH 93516 W17A	APP CRS 171°	Rwy Idg 5000 TDZE 5 Apt Elev 5
--	------------------------	---



RNAV (GPS) RWY 17
MARCO ISLAND EXEC (MKY)

PBN APCH.

▼ Baro-VNAV and VDP NA when using Naples altimeter setting. Rwy 17
▲ helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. When local altimeter setting not received, use Naples altimeter setting and increase LPV DA to 326 feet; increase LNAV/VNAV DA to 484 feet, increase all MDAs 40 feet and LNAV visibility Cat C to $1\frac{1}{4}$ SM and Circling visibility Cat C to 2 SM.

MISSED APPROACH: Climb to 2000 direct ONSAW and hold.

AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF) 0
---------------------	--	-------------------	--------------------------

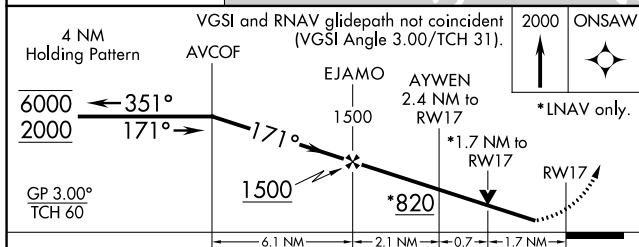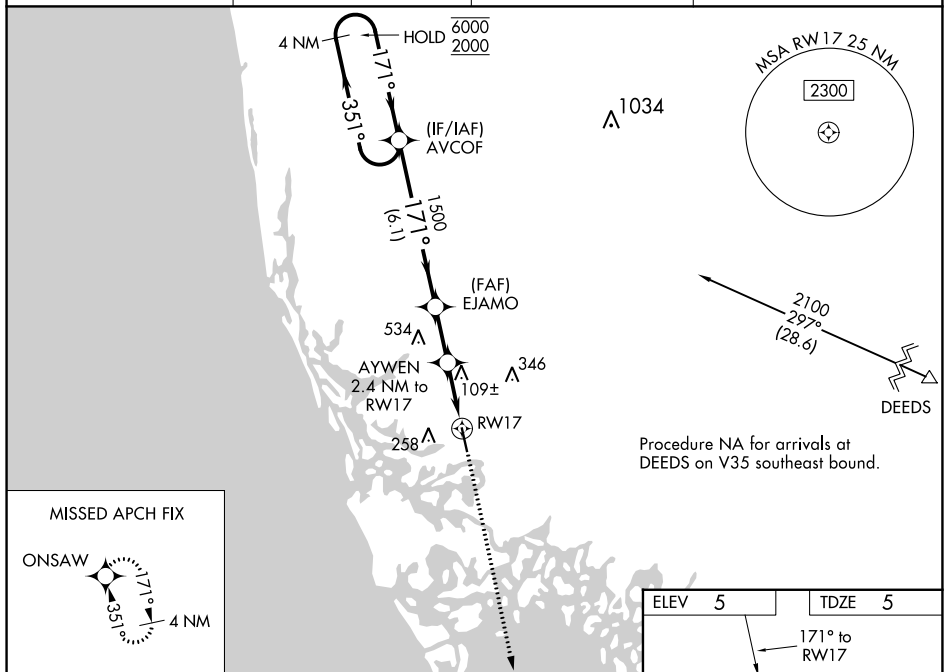

CATEGORY	A	B	C	D
LPV DA	300-1 295 (300-1)			
LNAV/ VNAV	458-1½ 453 (500-1½)			
LNAV MDA	560-1	555 (600-1)	560-1½ 555 (600-1½)	560-1¾ 555 (600-1¾)
CIRCLING	620-1	615 (700-1)	660-1¾ 655 (700-1¾)	840-2¾ 835 (900-2¾)

