

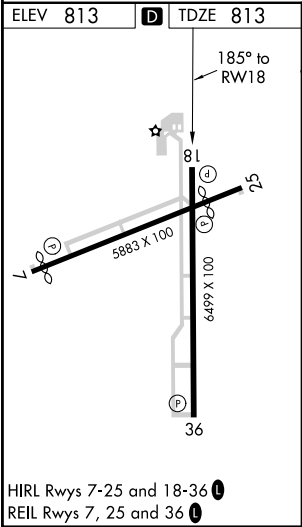
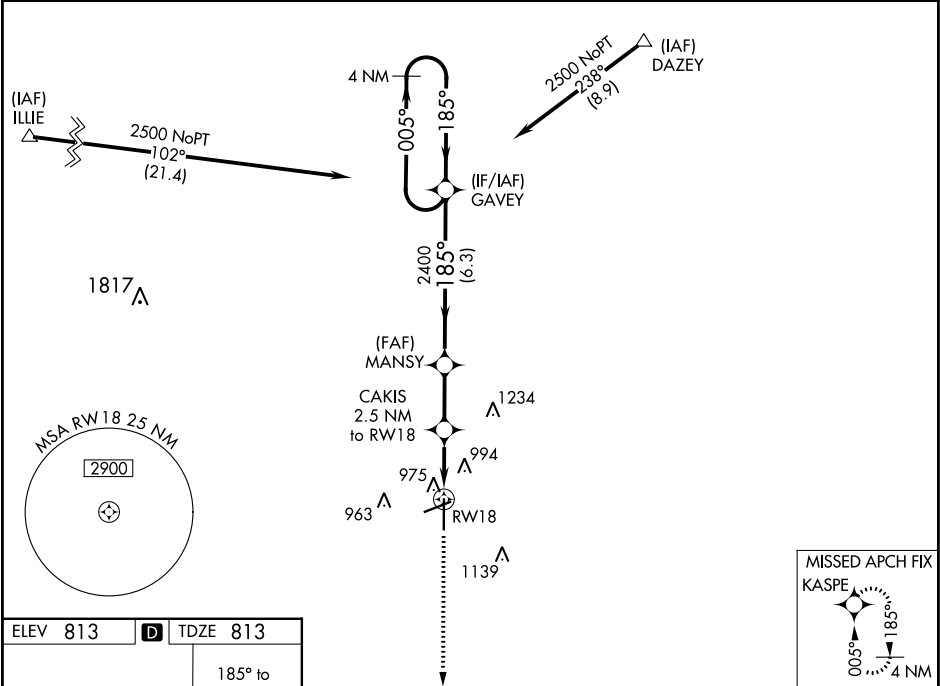
WAAS CH <b>70405</b> <b>W18A</b>	APP CRS <b>185°</b>	Rwy Idg TDZE Apt Elev	<b>6499</b> <b>813</b> <b>813</b>
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 18

FINDLAY (FDY)

RNP APCH-GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. When local altimeter setting not received, use Lima Allen County altimeter setting: increase all DAs/MDAs 80 feet; increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Circling Rwy 7 NA at night.	MISSED APPROACH: Climb to 2600 direct KASPE and hold.
---------------	--	--

ASOS <b>132.85</b>	TOLEDO APP CON <b>120.8 317.55</b>	UNICOM <b>122.725 (CTAF) 0</b>
-----------------------	---------------------------------------	-----------------------------------



2600	KASPE	GAVEY				4 NM Holding Pattern
						
*LNAV only	CAKIS 2.5 NM to RW18	MANSY 2400	185°			005° → 2500
	*1.4 NM to RW18		← 185°			
		*1640	2400	GP 3.00° TCH 43		
	1.4 NM	1.1 NM	2.3 NM	6.3 NM		
CATEGORY	A	B	C	D		
LPV DA	1063-1 250 (300-1)					
LNAV/VNAV DA	1320-1¾ 507 (600-1¾)					
LNAV MDA	1300-1	487 (500-1)	1300-1⅔ 487 (500-1⅔)	1300-1½ 487 (500-1½)		
CIRCLING	1440-1	627 (700-1)	1440-1¾ 627 (700-1¾)	1540-2¼ 727 (800-2¼)		

EC-2, 13 JUL 2023 to 10 AUG 2023

EC-2, 13 JUL 2023 to 10 AUG 2023