

WAAS CH 45615 W15A	APP CRS 151°	Rwy Idg TDZE 1020 Apt Elev 1021	6600
--	------------------------	---	-------------

RNAV (GPS) RWY 15



MANKATO RGNL (MKT)

⚠ Baro-VNAV NA when using Waseca altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.

⚠ When local altimeter setting not received, use Waseca altimeter setting; increase LPV DA to 1430 feet, LNAV/VNAV DA to 1473 feet and visibility LPV ¼ SM and LNAV/VNAV ⅓ SM all Cats; increase all MDA 60 feet and visibility LNAV Cat C and D and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 2900 direct
ANIMY and hold.

AWOS-3PT 118.175	MINNEAPOLIS CENTER 135.0 306.9	UNICOM 122.725 (CTAF) ①
----------------------------	--	-----------------------------------

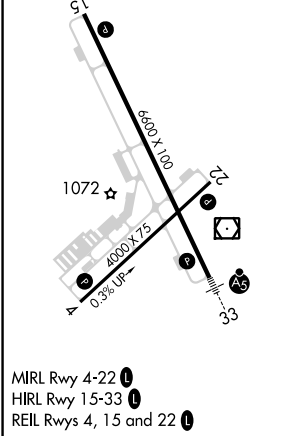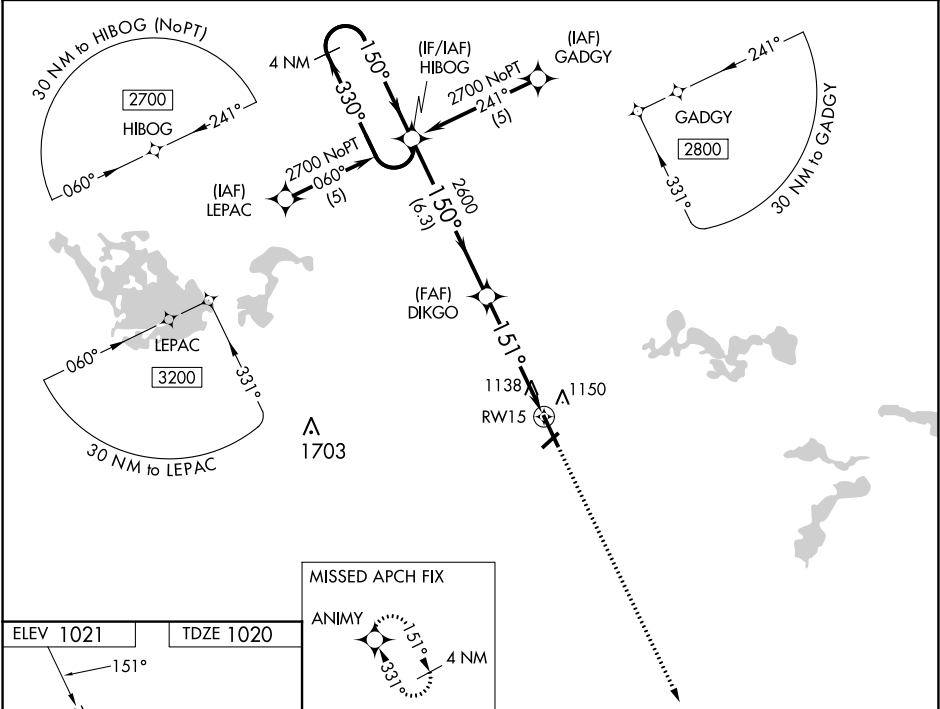

MISSED APCH FIX				ANIMY	
4 NM Holding Pattern				2900 ANIMY	
GP 3.00° TCH 48				*1 NM to RW15	
HIBOG				*LNAV Only.	
DIKGO				RW15	
2700 ← 330° 150° →				6.3 NM 3.7 NM 1 NM	
2600 ← 150° 151° →					
CATEGORY	A	B	C	D	
LPV DA		1373-1⅓	353 (400-1⅓)		
LNAV/VNAV DA		1416-1⅓	396 (400-1⅓)		
LNAV MDA		1400-1	380 (400-1)		
CIRCLING	1460-1 439 (500-1)	1480-1 459 (500-1)	1600-1½ 579 (600-1½)	1600-2 579 (600-2)	