


WAAS CH <b>40107</b> <b>W17A</b>	APP CRS <b>163°</b>	Rwy Idg <b>4200</b> TDZE <b>1047</b> Apt Elev <b>1047</b>
--	------------------------	---


RNAV (GPS) RWY 17  
DECATUR MUNI (LUD)

RNP APCH. <div>When local altimeter setting not received, use Fort Worth Meacham Intl altimeter setting and increase all DAs 113 feet, and all MDAs 120 feet, increase LPV visibilities ¼ mile, LNAV/VNAV visibilities ½ mile, and circling Cat B visibility ¼ mile. Baro-VNAV and VDP NA when using Fort Worth Meacham Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).</div>	MISSED APPROACH: Climb to 2600 direct HIRGO and hold.
---	---

AWOS-3 <b>118.225</b>	REGIONAL APP CON <b>118.1 306.95</b>	UNICOM <b>122.8(CTAF) 0</b>
--------------------------	---	--------------------------------

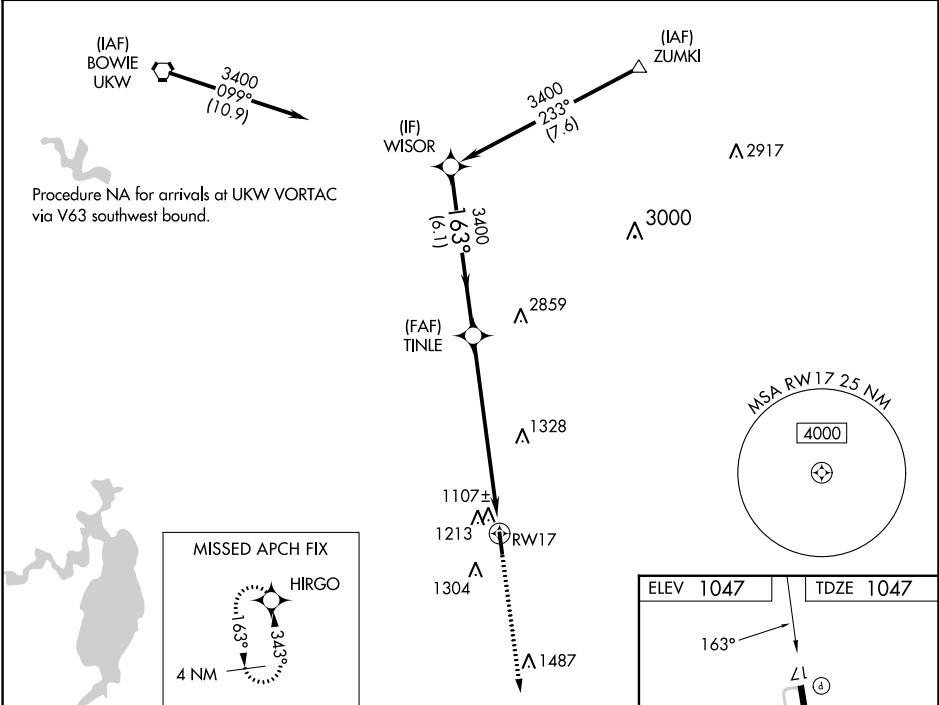

Procedure Turn NA				
WISOR				
TINLE				
3400				
163°				
3400				
* 1.3 NM to RWY 17				
* LNAV only				
RWY 17				
GP 3.00° TCH 45				
6.1 NM				
5.8 NM				
1.3 NM				
CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)	NA	
LNAV/VNAV DA	1459-1½	412 (500-1½)	NA	
LNAV MDA	1560-1	513 (600-1)	NA	
CIRCLING	1680-1	633 (700-1)	NA	

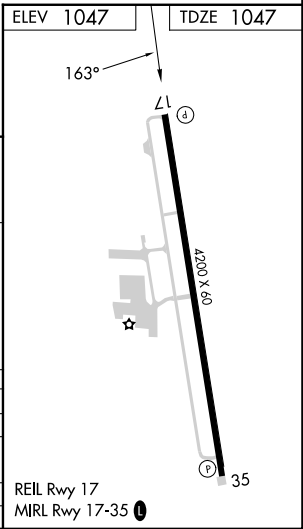

SC-2, 13 JUL 2023 to 10 AUG 2023

SC-2, 13 JUL 2023 to 10 AUG 2023