

WAAS CH <b>56602</b> <b>W25A</b>	APP CRS <b>248°</b>	Rwy Idg <b>5004</b> TDZE <b>949</b> Apt Elev <b>949</b>
--	------------------------	---

**RNAV (GPS) RWY 25**  
GREENE COUNTY/LEWIS A JACKSON RGNL (I19)

RNP APCH.


▼

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.  
Rwy 25 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Dayton/Wright Brothers altimeter setting. When local altimeter setting not received, use Dayton/Wright Brothers altimeter setting: increase LPV DA to 1249 feet; increase LNAV/VNAV DA to 1252 feet; increase all MDA 40 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH:  
Climb to 2700 direct UYOKO and hold.

AWOS-3 <b>118.525</b>	COLUMBUS APP CON <b>118.85 269.275</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	---	---------------------------------

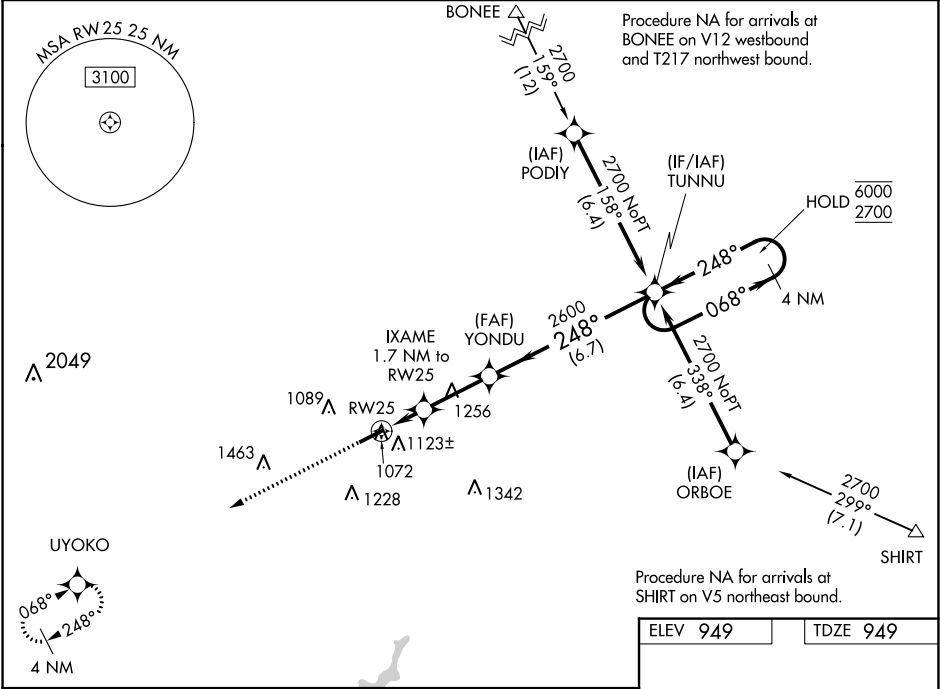

2700 ↑	UYOKO ✦	4 NM Holding Pattern			
* LNAV only.		IXAME 1.7 NM to RW25	YONDU 2600	TUNNU	6000 2700
* 1 NM to RW25			248°	068° → ← 248°	
RW25		* 1620	2600	GP 3.50° TCH 40	
1 NM 0.7		2.6 NM	6.7 NM		
CATEGORY	A		B	C	D
LPV DA	1219-1		270 (300-1)		NA
LNAV/ VNAV DA	1222-1		273 (300-1)		NA
LNAV MDA	1340-1	391 (400-1)	1340-1 <sup>1</sup> / <sub>8</sub> 391 (400-1 <sup>1</sup> / <sub>8</sub> )		NA
CIRCLING	1480-1	531 (600-1)	1560-1 <sup>3</sup> / <sub>4</sub> 611 (700-1 <sup>3</sup> / <sub>4</sub> )		NA

ELEV 949

TDZE 949

MIRL Rwy 7-25 0

REIL Rws 7 and 25 0

EC-2, 13 JUL 2023 to 10 AUG 2023

EC-2, 13 JUL 2023 to 10 AUG 2023