

WAAS CH 86512 W06A	APP CRS 060°	Rwy Idg TDZE Apt Elev	5702 604 609
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

RALEIGH RGNL AT PERSON COUNTY (TDF)



RNP APCH

Baro-VNAV and VDP NA when using Danville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Danville altimeter setting; increase LPV DA to 916 and LNAV/VNAV DA to 1150; increase all MDAs 80 feet and increase LNAV Cat C visibility ¾ SM and Circling Cats C/D visibility ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM and LNAV Cat C visibility to 1 SM. For inop ALS, when using Danville altimeter setting, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1¾ SM, and LNAV Cat D visibility to 1¾ SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct
TACUV and hold.

AWOS-3 126.725	RALEIGH APP CON 132.35 256.9	GCO 119.7	UNICOM 122.7 (CTAF)
--------------------------	--	---------------------	-------------------------------

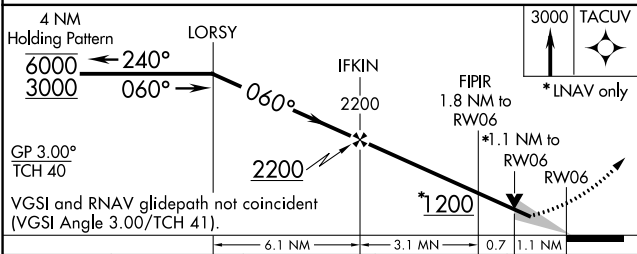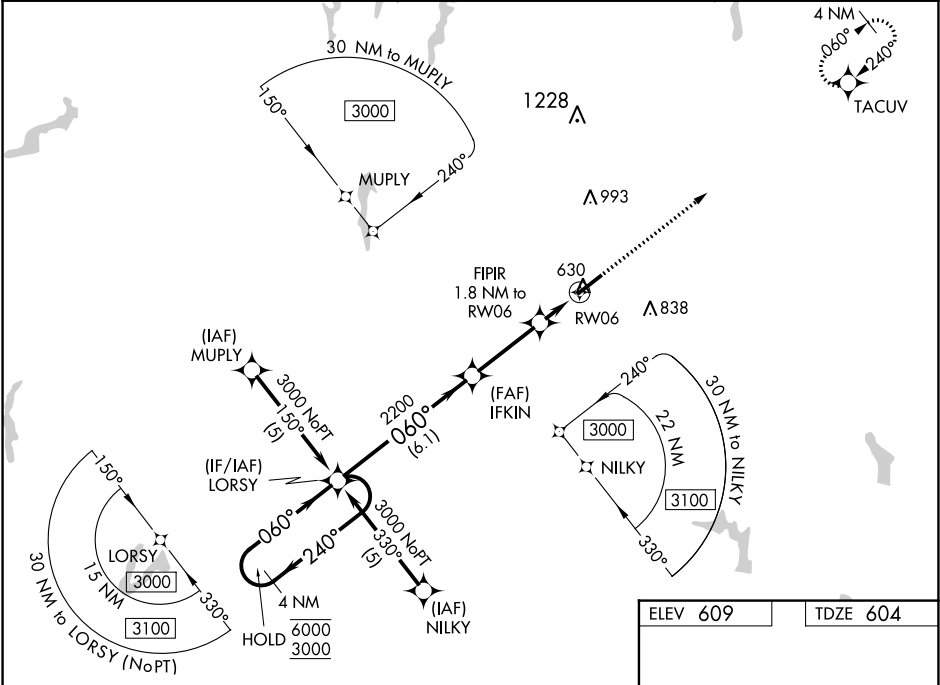

CATEGORY	A	B	C	D
LPV DA	854-½		250 (300-½)	
LNAV/VNAV DA	1090-1¼		486 (500-1¼)	
LNAV MDA	980-½	376 (400-½)	980-⅝	980-1
			376 (400-⅝)	376 (400-1)
CIRCLING	1080-1	471 (500-1)	1300-2	1300-2¼
			691 (700-2)	691 (700-2¼)

