RNP APCH - GPS

V

Α

NC-3,


13 JUL 2023 to 10 AUG 2023

WAAS 5000 Rwy Idg APP CRS CH 97414 463 TDZE 259° Apt Elev W26A 463

RNAV (GPS) RWY 26R SPIRIT OF ST LOUIS (SUS)

Rwy 26R helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. VDP and MISSED APPROACH: Climb to Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local 3000 direct EXESS and hold. altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase LPV DA to 768 feet, LNAV/VNAV DA to 834 feet, and all MDA 60 feet, increase

LPV and LNAV/VNAV all Cats visibility 1/8 mile. ST. LOUIS CLNC DEL ST. LOUIS APP CON CLNC DEL ATIS SPIRIT TOWER★ **GND CON** UNICOM 121.7 134.8 126.5 254.3 124.75 (CTAF) 0 257.2 121.7 133.1 122,95 (when tower closed) **FASHE** SARW26R 25 M Procedure NA for arrivals at FASHE

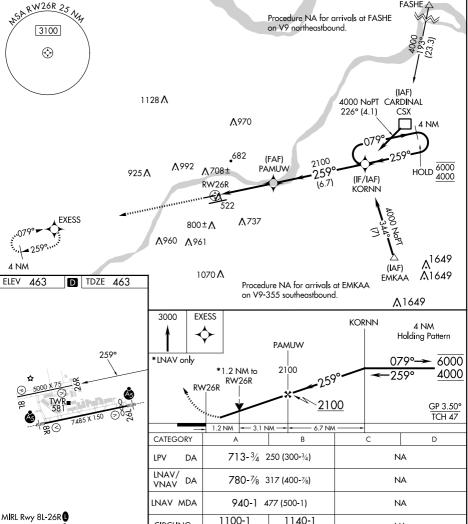

HIRL Rwy 8R-26L 🗓 ST. LOUIS, MISSOURI Amdt 1A 06OCT22

637 (700-1)

677 (700-1)

CIRCLING