

WAAS CH <b>40115</b> <b>W33A</b>	APP CRS <b>326°</b>	Rwy Idg TDZE Apt Elev	<b>4000</b> <b>1025</b> <b>1025</b>
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 33

PLATTEVILLE MUNI (PVB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).  
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dubuque altimeter setting and  
increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1497 feet and all Cats visibilities ¼ SM;  
increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA  
when using Dubuque altimeter setting.

MISSED APPROACH:  
Climb to 3000 direct  
CEWUF and hold.

AWOS-3 <b>120.575</b>	CHICAGO CENTER <b>133.95 281.4</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	---------------------------------------	---------------------------------

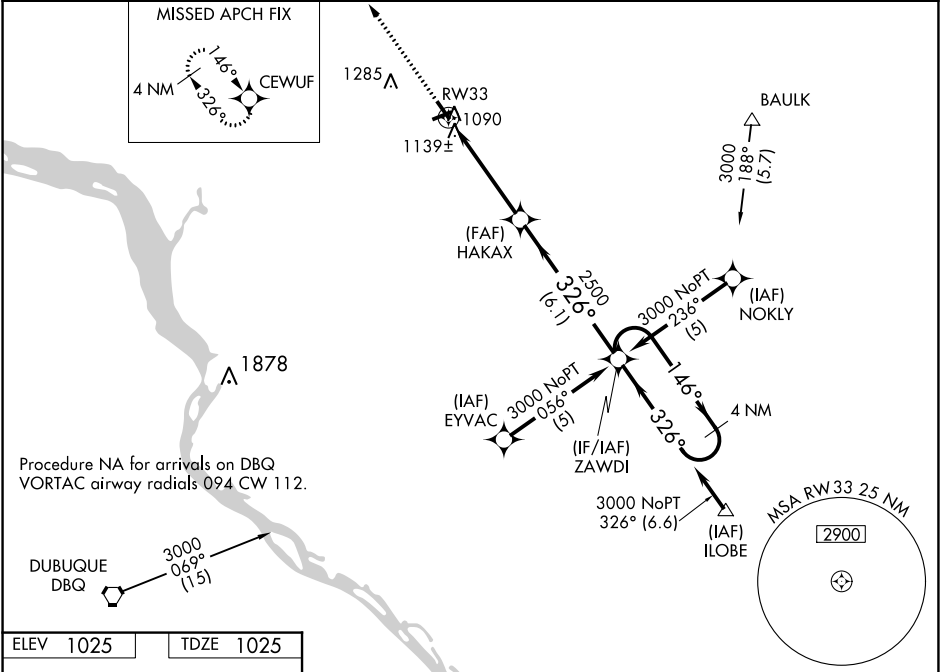

ELEV 1025	TDZE 1025
-----------	-----------

