




WAAS CH <b>53537</b> <b>W21A</b>	APP CRS <b>205°</b>	Rwy Idg TDZE Apt Elev	<b>5197</b> <b>935</b> <b>937</b>
--	------------------------	-----------------------------	---

**RNAV (GPS) RWY 21**  
DELAWARE COUNTY RGNL (MIE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ¾ mile and LNAV/VNAV all Cats and Circling Cats C/D visibility ½ mile. Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:  
Climb to 2800 direct  
APPAL and hold.

ATIS <b>133.25</b>	INDIANAPOLIS CENTER <b>120.65 317.8</b>	MUNCIE TOWER ★ <b>120.1 (CTAF) 0</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	--	---	-------------------------	-------------------------

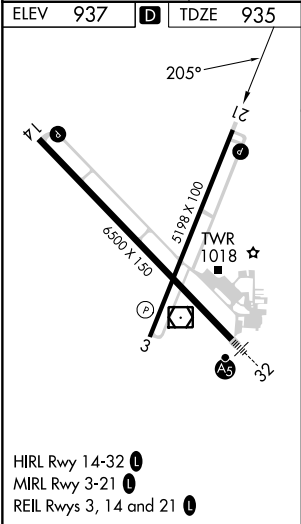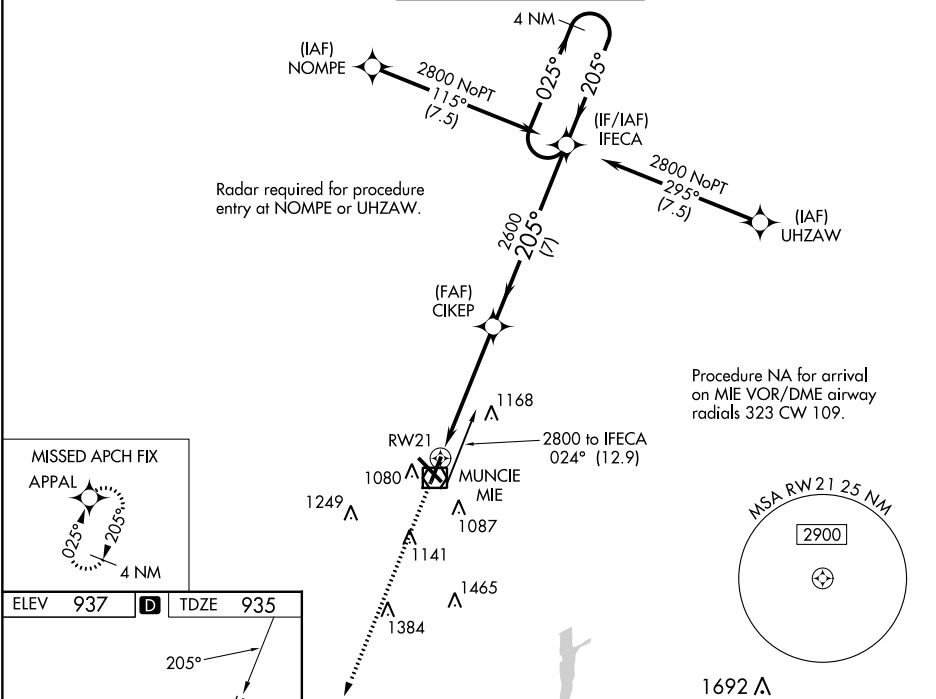

2800	APPAL	*LNAV only	CIKEP	IFECA	4 NM Holding Pattern
		*1.3 NM to RWY21	2600	2600	2800
				205°	205°
				205°	205°
				GP 3.00°	TCH 45
				1.3	3.8 NM
				7 NM	
CATEGORY	A	B	C	D	
LPV DA		1195-7/8	260 (300-%)		
LNAV/VNAV DA		1351-13/8	416 (500-1%)		
LNAV MDA	1400-1	465 (500-1)	1400-13/8	465 (500-1%)	
CIRCLING	1460-1	523 (600-1)	1500-11/2	1600-2	
			563 (600-11/2)	663 (700-2)	

EC-2, 13 JUL 2023 to 10 AUG 2023

EC-2, 13 JUL 2023 to 10 AUG 2023