


WAAS CH 72612 W35A	APP CRS 350°	Rwy Idg 4400 TDZE 769 Apt Elev 769
--	------------------------	---

RNAV (GPS) RWY 35
HANNIBAL RGNL (HAE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F).
A DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
 When local altimeter setting not received, use Quincy altimeter setting; increase all DA 41 feet, all MDA 60 feet, and Circling Cat C visibility ¼ SM.
 Baro-VNAV and VDP NA when using Quincy, IL altimeter setting.

MISSED APPROACH: Climb to 3000
direct DORUW and hold.

AWOS-3PT 120.775	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) ①
----------------------------	--	---------------------------------

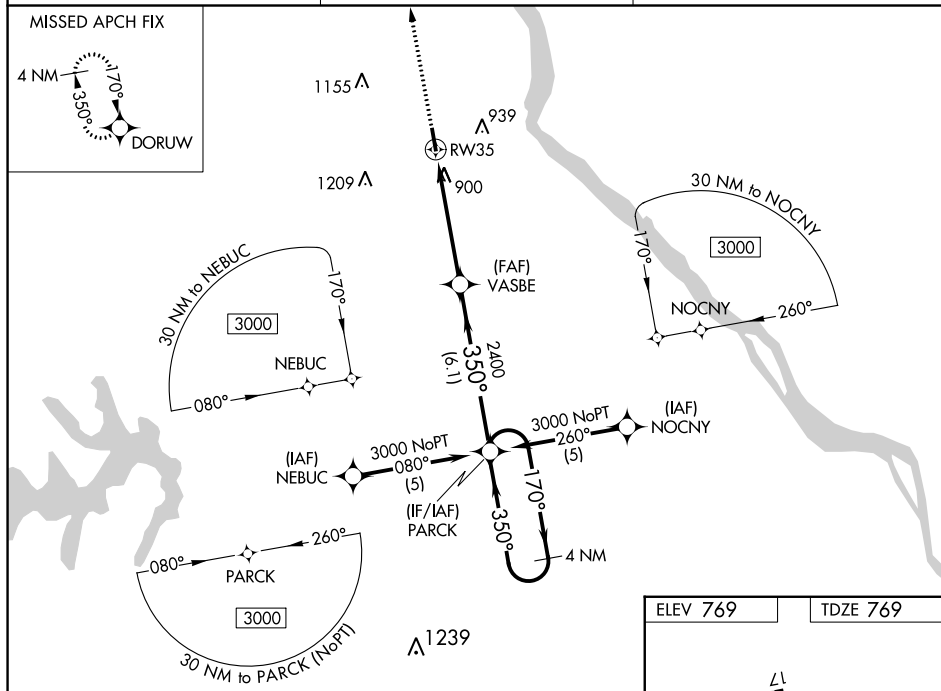

3000 ↑ DORUW

*LNAV only *1.2 NM to RW35

RW35

VASBE

PARCK

4 NM Holding Pattern

170° → 3000

← 350°

350°

2400

GP 3.00° TCH 40

1.2 NM 3.7 NM 6.1 NM

CATEGORY	A	B	C	D
LPV DA	1019-1	250 (300-1)		NA
RNAV/DA	1242-1 $\frac{3}{4}$	473 (500-1 $\frac{3}{4}$)		NA
RNAV MDA	1200-1	431 (500-1)	1200-1 $\frac{1}{4}$ 431 (500-1 $\frac{1}{4}$)	NA
CIRCLING	1260-1	491 (500-1)	1640-2 $\frac{1}{2}$ 871 (900-2 $\frac{1}{2}$)	NA

