
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D.

WAAS CH 93619 APP CRS TDZE 1114 Apt Elev 1114

RNP APCH.

RNAV (GPS) RWY 17 HALLIBURTON FLD (DUC)

ODALS MISSED APPROACH:
Climb to 3000 direct
ACUGI and hold.

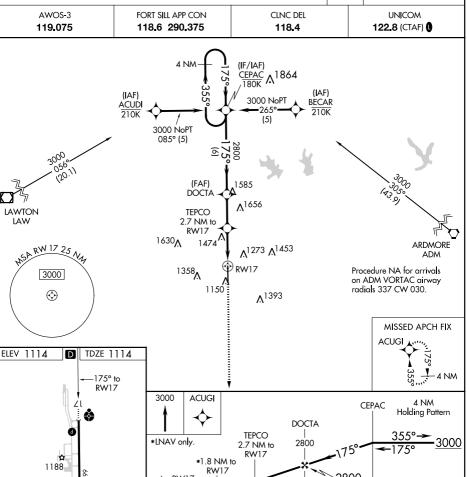

6650 X 2800 RW17 *2020 GP 3.00° 9 TCH 53 -0.9 NM 2.4 NM-6 NM CATEGORY ח 1314-3/4 LPV DA 200 (200-3/4) LNAV/ DA 1806-21/2 692 (700-21/2) VNAV 35 1740-3/4 1740-13/4 626 (700-13/4) LNAV MDA 626 (700-3/4) MIRL Rwy 17-35 🗓 1780-13/4 1780-2 CIRCLING 626 (700-1) 1740-1 REIL Rwy 35 Q 666 (700-1%) 666 (700-2)

DUNCAN, OKLAHOMA Amdt 2A 18JUN20

SC-1, 13 JUL 2023

ō

10 AUG 2023