


WAAS CH 40423 W12A	APP CRS 126°	Rwy Idg TDZE Apt Elev	5704 2458 2458
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 12

DAWSON COMMUNITY (GDV)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 12 helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 6000 direct ZORAS and on track 060° to YAFLU and hold, continue climb-in-hold to 6000.
--	--

AWOS-3PT 135.075	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

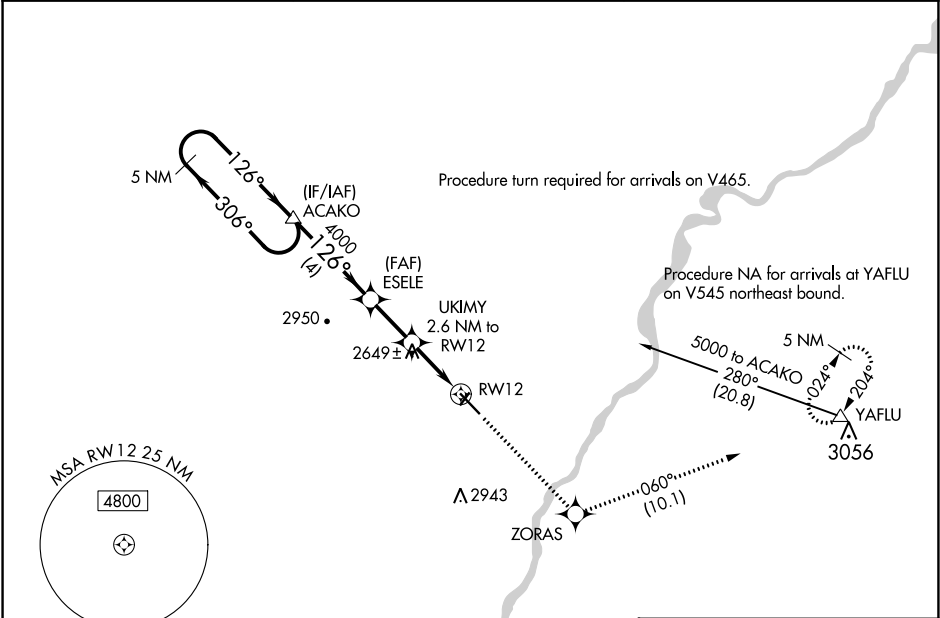

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).					6000 ↑	ZORAS ✱	YAFLU tr 060° △	ELEV 2458	D	TDZE 2458
5 NM Holding Pattern		ACAKO	ESELE 4000		UKIMY 2.6 NM to RW12		*LNAV only		126° to RW12	
5000 ← 306° 126° →		4000		*3320		RW12				
GP 3.00° TCH 52		4 NM		2.1 NM		2.6 NM				
CATEGORY	A	B	C	D						
LPV DA	2708-1 250 (300-1)									
LNAV/VNAV DA	2708-1 250 (300-1)									
LNAV MDA	2900-1 442 (500-1)		2900-1 3/8 442 (500-1 3/8)							
CIRCLING	2900-1 442 (500-1)	2920-1 462 (500-1)	3280-2 1/2 822 (900-2 1/2)	3280-2 3/4 822 (900-2 3/4)						
					REIL Rwy 12 and 30 MIRL Rwy 2-20 and 12-30					