
Rwy 22 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Circling NA for Cat D NW of Rwy 04-22. When local altimeter setting not received, use Lima altimeter A NA setting and increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM and Circling visibility Cat C 1/4 SM.

MISSED APPROACH: Climb to 3000 direct YEDUK and hold.

AWOS-3 COLUMBUS APP CON **AOH ASOS** UNICOM 126.4 128.725 118.425 323.15 122.8 (CTAF) (





YEDUK

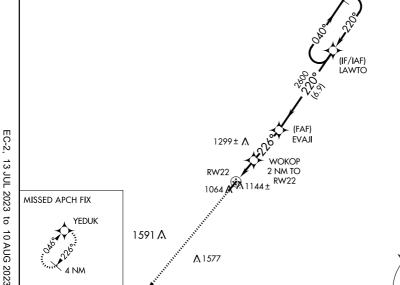

TDZE 1023

MIRL Rwy 4-22 (1





Holding Pattern IAWTO **EVAJ** WOKOP 3000 2 NM TO RW22 RW22 2600 1680 2 NM 6.9 NM

CATEGORY LNAV MDA 1460-1 437 (500-1) 1580-1 1620-1 CIRCLING

Visual Segment - Obstacles

551 (600-1) 40°37′N - 83°39′W

HARDIN COUNTY (195)

1460-11/2

437 (500-11/2)

1620-2

591 (600-2)

1460-11/4

437 (500-11/4) 1620-11/2

591 (600-11/2)

KENTON, OHIO Orig-B 06OCT22

ELEV 1029

591 (600-1)