

APP CRS	Rwy Idg	11200
230°	TDZE	783
	Apt Elev	796

RNAV (RNP) Z RWY 23R

INDIANAPOLIS INTL (IND)

▼


For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

MALSR

MISSED APPROACH:

Climb to 1200 then climbing right turn to 3000 direct KEADY and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 257.8	GND CON 121.9	CLNC DEL 128.75 257.8	CPDLC
------------------	---------------------------------------	---------------------------	------------------	--------------------------	-------

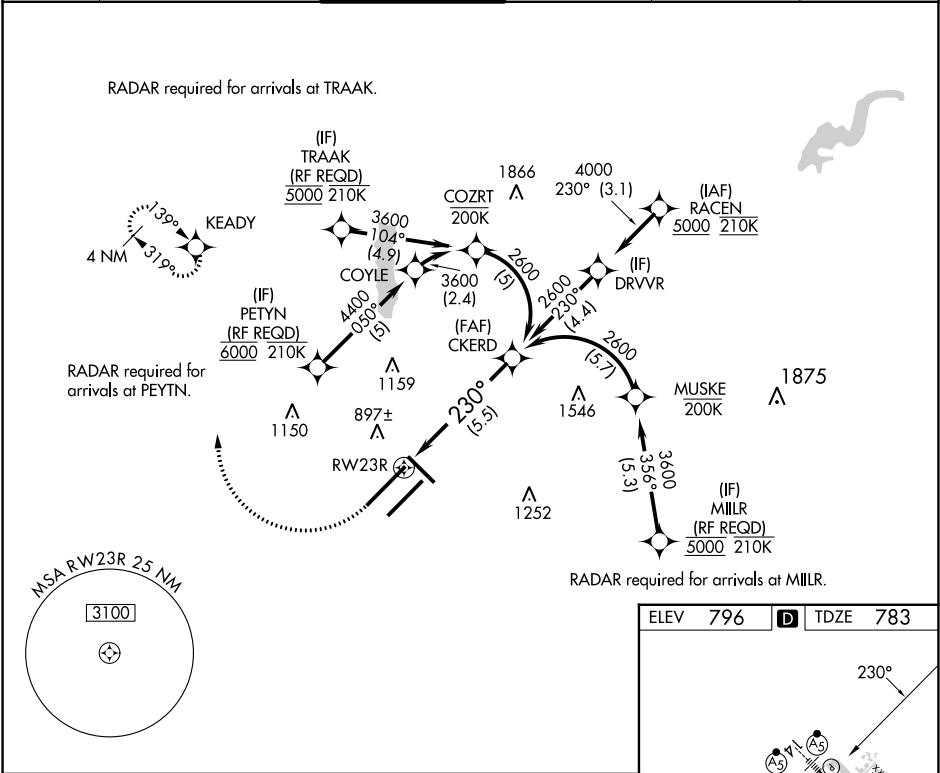

1200

3000

KEADY

See planview for multiple IF locations.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

CATEGORY	A	B	C	D
RNP 0.15 DA		1147/40	364 (400-¾)	
RNP 0.30 DA		1206/50	423 (500-1)	

AUTHORIZATION REQUIRED

