SC-1, 13 JUL 2023 to 10 AUG 2023


WAAS	APP CRS	Rwy Idg	5002
CH 66008		TDZE	239
W18A		Apt Elev	239
RNP APCH-GPS.			

RNAV (GPS) RWY 18

NEWPORT RGNL (M19)

When local altimeter setting not received, use Batesville altimeter setting: increase LPV DA to 575 feet and all visibilities ½ SM; increase LNAV/NNAV DA to 845 feet and all visibilities ½ SM; increase all MDAs 100 feet and visibility Cats C ½ SM and D ½ SM. VDP NA when using Batesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct VURHU and hold.

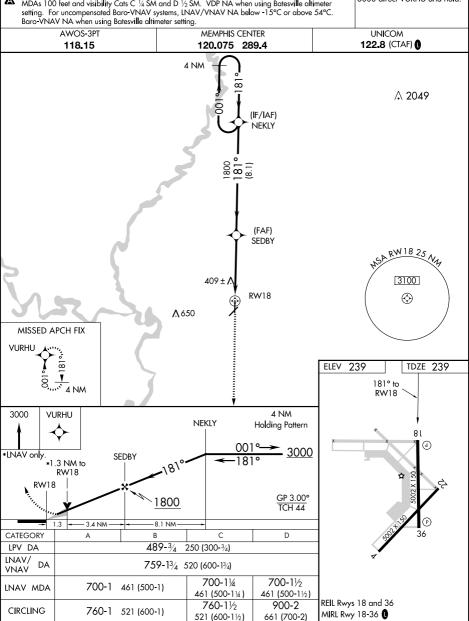

NEWPORT, ARKANSAS Orig-B 09SEP21

NEWPORT RGNL (M19) RNAV (GPS) RWY 18