

WAAS  
CH **63014**  
**W29A**

APP CRS  
**290°**

Rwy Idg  
TDZE  
Apt Elev

**5101**  
**1724**  
**1730**

**RNAV (GPS) RWY 29**

SCHUYLKILL COUNTY/JOE ZERBEY (Z<sub>ER</sub>)

RNP APCH - GPS

▼

▲ NA


Circling NA to Rws 4 and 22. Baro-VNAV NA when using Selinsgrove altimeter setting.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.  
VDP NA when using Selinsgrove altimeter setting. When local altimeter setting not received,  
use Selinsgrove altimeter setting: increase LPV DA to 2156 feet and visibility ½ SM;  
LNAV/VNAV DA to 2376 feet and visibility ¾ SM; increase all MDAs 240 feet and  
visibility LNAV Cats C/D ½ SM and Circling Cats C/D ½ SM.

MISSED APPROACH:  
Climb to 4000 direct  
IRCIT and hold.

AWOS-3  
**127.575**

HARRISBURG APP CON  
**118.25 269.45**

UNICOM  
**123.075 (CTAF) 0**

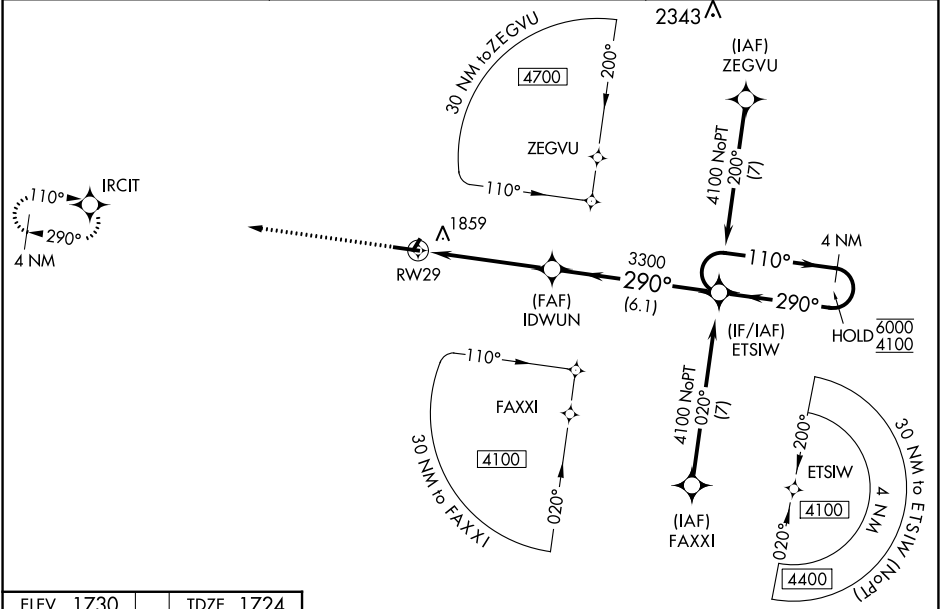

ELEV 1730

TDZE 1724

4000

IRCIT

REIL Rws 11 and 29

MIRL Rwy 11-29

5101 X 75

0.5% UP

290° to RWY 29

1.2 NM to RWY 29

3.7 NM

6.1 NM

3300

3300

3300

1.2 NM to RWY 29

3.7 NM

6.1 NM

4000

IRCIT

4 NM

Holding Pattern

ETSIW

IDWUN

RWY 29

110°

290°

290°

6000

4100

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA	1924-¾	200 (200-¾)		
LNAV/VNAV DA	2144-1½	420 (500-1½)		
LNAV MDA	2120-1	396 (400-1)	2120-1½	396 (400-1½)
CIRCLING	2160-1 430 (500-1)	2180-1 450 (500-1)	2180-1½ 450 (500-1½)	2280-2 550 (600-2)