

WAAS CH <b>82418</b> <b>W18A</b>	APP CRS <b>186°</b>	Rwy Idg TDZE Apt Elev	<b>5700</b> <b>6763</b> <b>6763</b>
--	------------------------	-----------------------------	---

**RNAV (GPS) RWY 18**  
PANGUITCH MUNI (U55)


**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Bryce Canyon altimeter setting and increase all DA 149 feet and all MDA 160 feet, increase LPV visibility ¼ mile and increase LNAV visibility and Circling Cat B visibility ¼ mile. Baro-VNAV and VDP NA with Bryce Canyon altimeter setting.

**MISSED APPROACH:** Climb to 12500 direct OPOYA and on track 216° to POBME and hold, continue climb-in-hold 12500.


AWOS-3  
133.125

SALT LAKE CENTER  
133.6 269.25

CTAF  
122.9 **L**

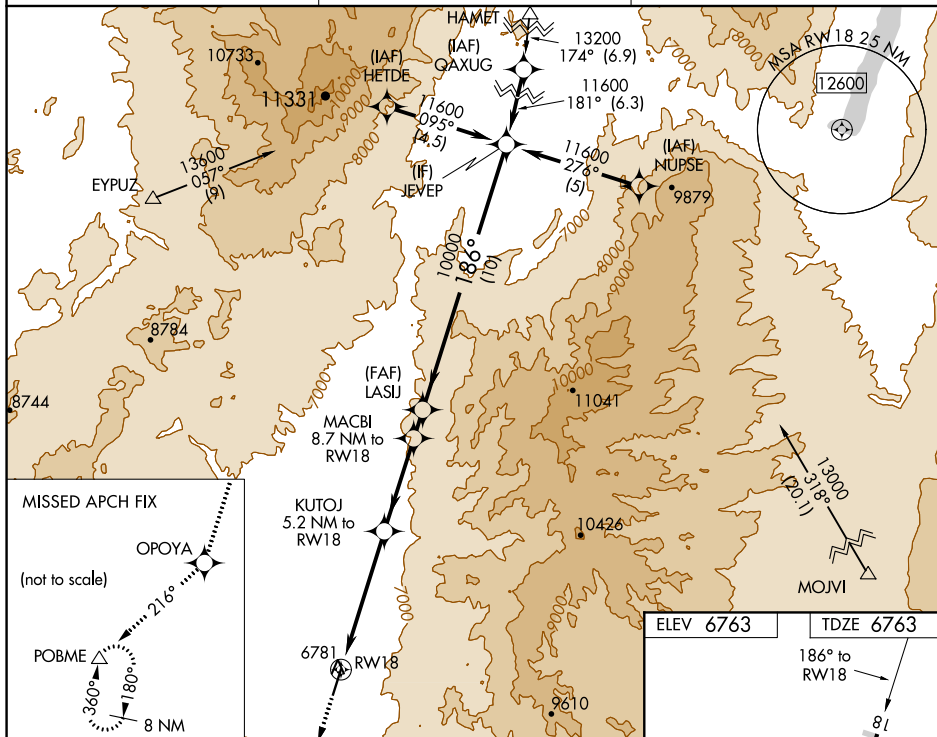

ELEV 6763		TDZE 6763
-----------	--	-----------

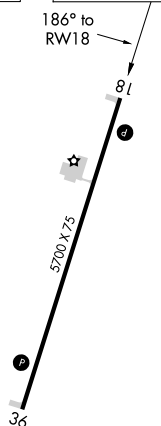

12500 ↑	OPOYA ✦	tr 216°	POBME △	MACBI 8.7 NM to RW18 LASIJ 10000 JEVEP 11600	
*LNAV only.				KUTOJ 5.2 NM to RW18 Procedure Turn NA GP 3.00° TCH 40'	
CATEGORY	A	B	C	D	
LPV DA	6963-1	200 (200-1)	NA		
LNAV/VNAV DA	7331-2	568 (600-2)	NA		
LNAV MDA	7460-1	697 (700-1)	NA		
<b>C</b> CIRCLING	7460-1	697 (700-1)	NA		