
22°C

Obtain local altimeter setting on CTAF; when not received, use Wilkes-Barre/Scranton Intl altimeter setting. VDP NA when using Wilkes-Barre/Scranton Intl altimeter setting.

MISSED APPROACH: Climbing left turn to 4000 direct LOPEZ and hold.

WILKES-BARRE APP CON 120.95 256.7

UNICOM 122.7 (CTAF) (

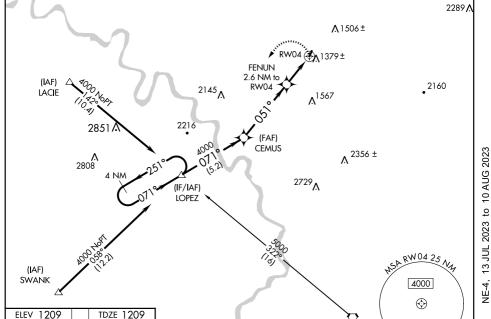

WILKES-BARRE LVZ IOPF7 CEMUS 4000 4 NM Holding Pattern **FENUN** 2.6 NM to 1.1 NM RW04 4000 to RW04 RW04 2180 3.49° \ TCH 40 -5.2 NM 4.9 NM -1.5 NM -CATEGORY C LNAV MDA 1640-1 431 (500-1) NA 1720-1 1780-1 051° to CIRCLING NA RW04 511 (600-1) 571 (600-1) WILKES-BARRE/SCRANTON INTL ALTIMETER SETTING MINIMUMS

1720-1

1800-1

591 (600-1)

511 (600-1)

1860-1

651 (700-1)

LNAV MDA

CIRCLING

FACTORYVILLE, PENNSYLVANIA Orig-A 14JUL22

LIRL Rwy 4-22 0

SEAMANS FLD (9N3)

NΑ

LOPEZ

Δ

D