APP CRS	Rwy ldg	6502
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.

T NA Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C.
**Missed approach requires a minimum climb of 417 feet per NM to 800.

MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

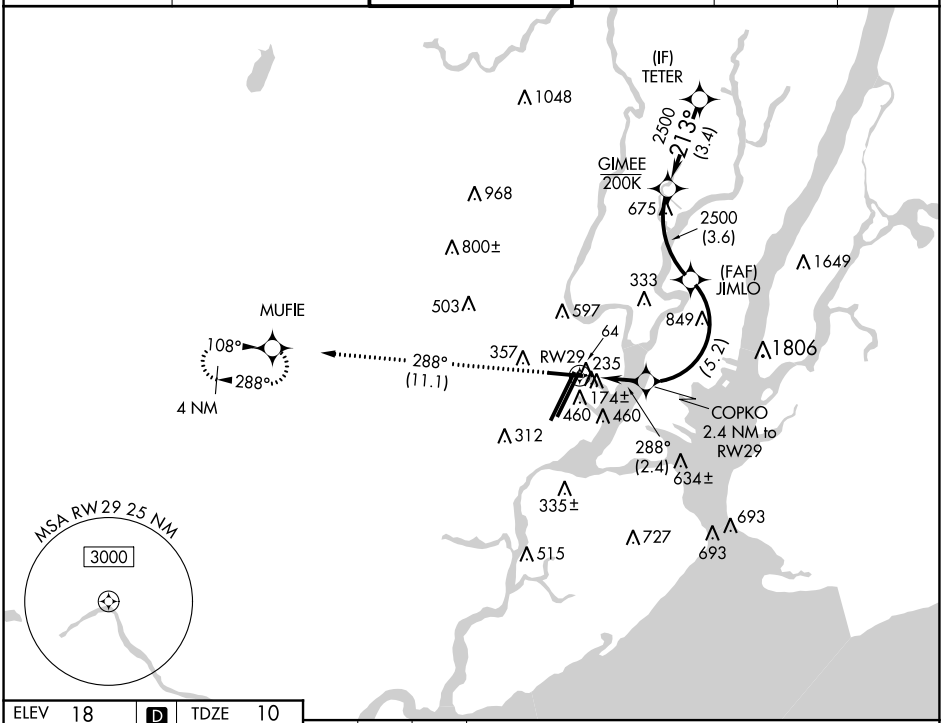

NE-2, 13 JUL 2023 to 10 AUG 2023

NE-2, 13 JUL 2023 to 10 AUG 2023

ELEV 18 D TDZE 10

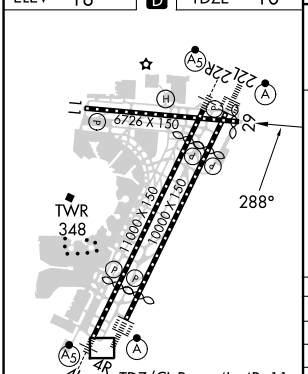

TDZ/CL Rwys 4L, 4R, 11, 22L, 22R, and 29
REIL Rwys 11, 22R, and 29
HIRL Rwys 4L-22R, 4R-22L, and 11-29

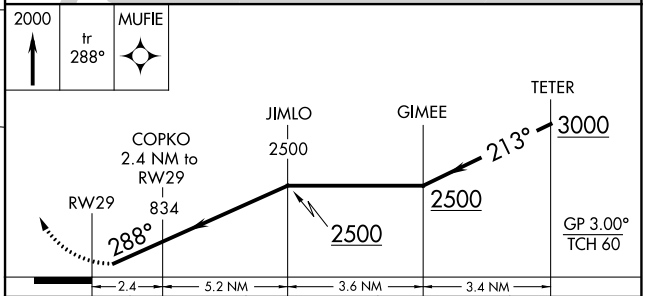

CATEGORY	A	B	C	D
RNP 0.16 DA	461-1½ 451 (500-1½)			
RNP 0.30 DA	** 530-1¾ 520 (600-1¾)			
RNP 0.30 DA	573-1⅞ 563 (600-1⅞)			

AUTHORIZATION REQUIRED