

APP CRS

Rwy Idg

10000

186°

TDZE

889

Apt Elev

896

RNAV (RNP) Z RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP AR APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 47°C. For inop ALS, increase RNP 0.25 all Cats visibility to RVR 6000, RNP 0.30 all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 on track 186° to LAPER and on track 136° to FLM VOR/DME and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL	CPDLC
ARR	DEP				
134.375	135.3	119.7 363.15 (090°-269°)	121.7	127.175	
		123.875 363.15 (270°-089°)			
		118.975 360.85 (RWY 18L/36R)			
		118.3 (RWYS 18C/36C, 09/27)			
		133.325 (RWY 18R/36L)			

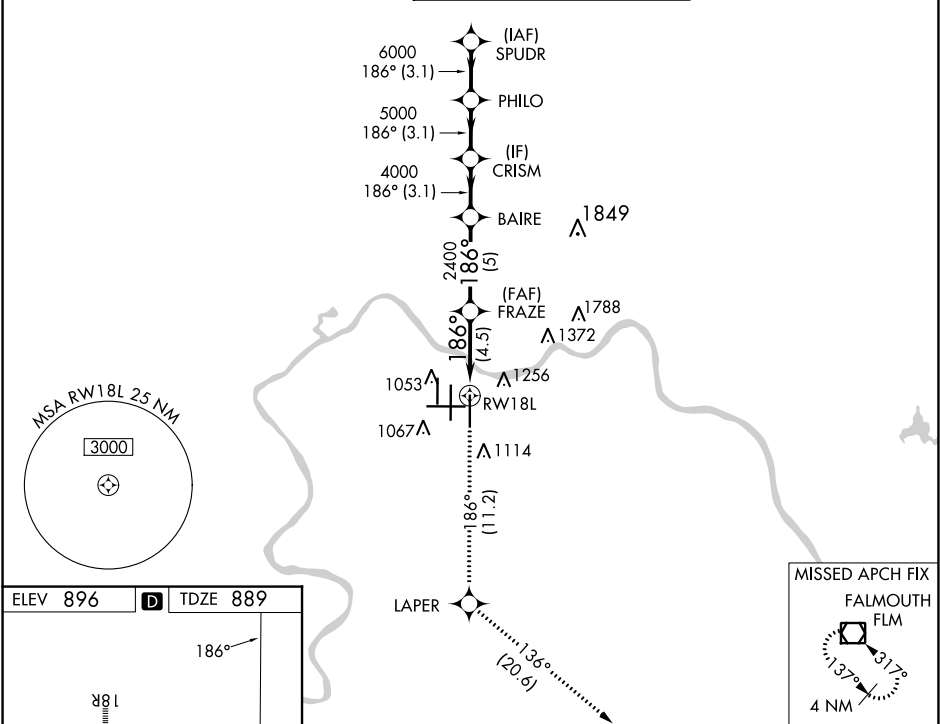

ELEV 896

TDZE 889

186°

18L

18C

36C

36R

TWR 1159

HIRL all Rwys

TDZ/CL all Rwys except 27

3000

LAPER

FLM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

3000

7000

2400

4000

5000

6000

GP 3.00° TCH 55

4.5 NM

5 NM

3.1 NM

3.1 NM

3.1 NM

CATEGORY	A	B	C	D
RNP 0.25 DA	1283/35	394 (400-¾)		
RNP 0.30 DA	1472-1¼	583 (600-1¼)		

AUTHORIZATION REQUIRED