

APP CRS	Rwy Idg	7702
201°	TDZE	578
	Apt Elev	599

RNAV (RNP) Z RWY 20R  
NASHVILLE INTL (BNA)

**T** GPS required. Simultaneous approach authorized with Rwy 20L. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). For inoperative MALSF, increase RNP 0.18 all Cats visibility to RVR 5600 and RNP 0.30 all Cats visibility to 1½.

MALSF



**MISSED APPROACH:**  
Climb to 3000 on track  
201° to BONIE and hold

D-ATIS  
135.1


NASHVILLE APP CON  
118.4 360.7

NASHVILLE TOWER  
118.6 257.8

GND CON  
121.9 348.6


CLNC DEL  
**126.05**


CPDLC

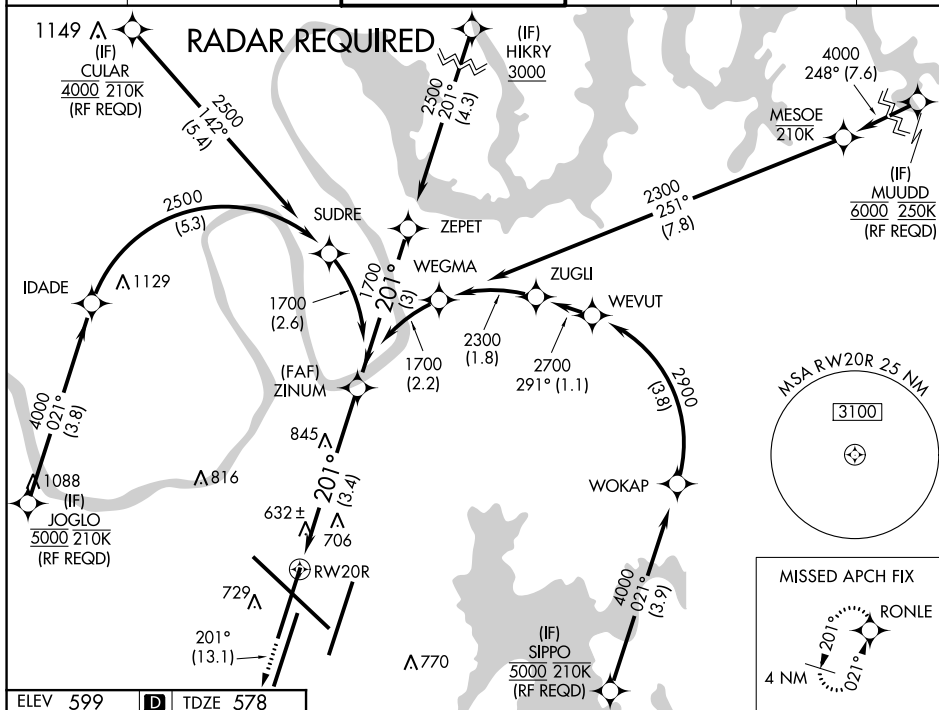

SE-1, 13 JUL 2023 to 10 AUG 2023


ELEV 599	<b>D</b>	TDZE 578
----------	----------	----------

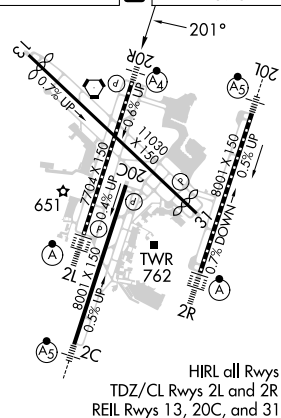

3000	tr 201°	RONLE 
------	------------	--

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00/TCH 79).

See planview for multiple IF locations.

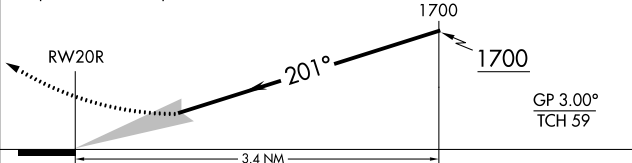

CATEGORY	A	B	C	D
RNP 0.18 DA		927/42	349 (400-7/8)	
RNP 0.30 DA		1042/60	464 (500-1 1/4)	

**AUTHORIZATION REQUIRED**