

WAAS CH 40329 W30A	APP CRS 300°	Rwy Idg 5199 TDZE 656 Apt Elev 656
--	------------------------	---

RNAV (GPS) RWY 30

WINONA MUNI-MAX CONRAD FIELD (ONA)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use La Crosse altimeter setting and increase all LPV DA to 1064 feet and visibility ½ mile all Cats, all LNAV/VNAV DA to 1193 and visibility ½ mile all Cats, and all MDA 60 feet, increase LNAV Cat C/D and Circling Cat B visibility ¼ mile. For ALP, increase LPV all Cats visibility to 1 ½ mile. For non ALS when using La Crosse altimeter setting, increase LPV all Cats visibility to 1 ½ mile, and LNAV Cats C/D visibility to 2 mile. Baro-VNAV and VDP NA when using La Crosse altimeter setting.

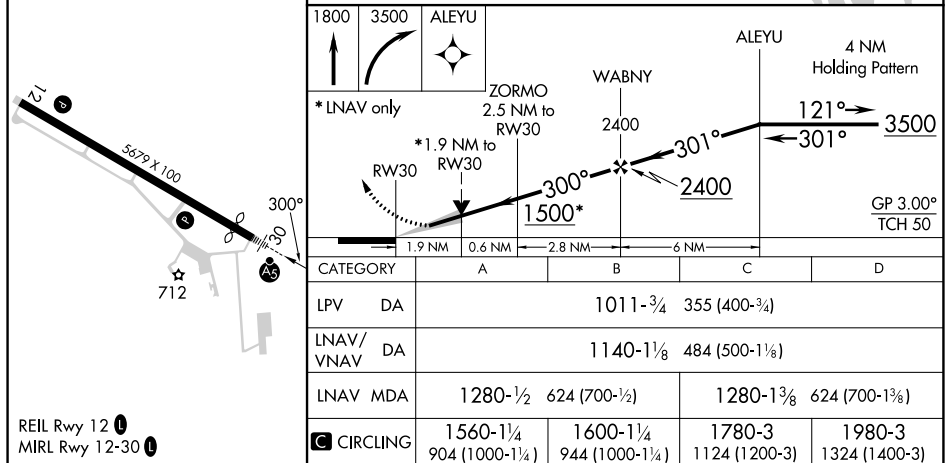
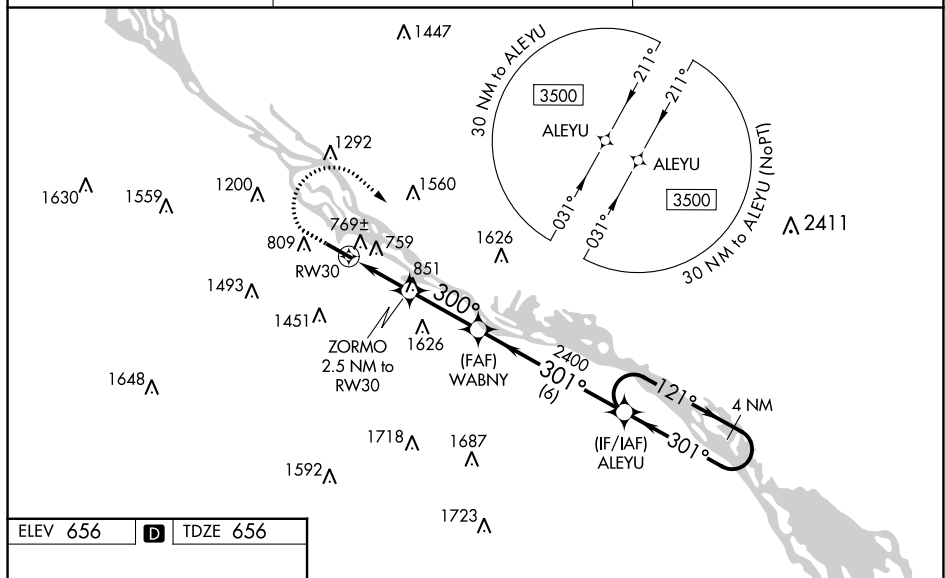
MALSR



MISSED APPROACH:
Climb to 1800 then
climbing right turn to
3500 direct ALEYU and
hold.

AWOS-3
118.075

MINNEAPOLIS CENTER
128.6 363.0

UNICOM
122.8 (CTAF) **L**

WINONA, MINNESOTA
Amdt 2A 22JUN17

44°05'N-91°43'W

WINONA MUNI-MAX CONRAD FIELD (ON A)

RNAV (GPS) RWY 30

NC-1, 13 JUL 2023 to 10 AUG 2023

NC-1, 13 JUL 2023 to 10 AUG 2023