
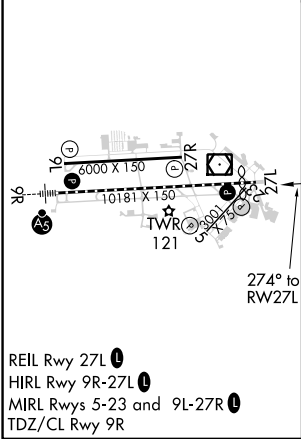


WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH.						
<div><div><div></div><div></div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°F (130°F).</div></div>			MISSED APPROACH: Climb to 2000 direct SUROY and hold.			
ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95

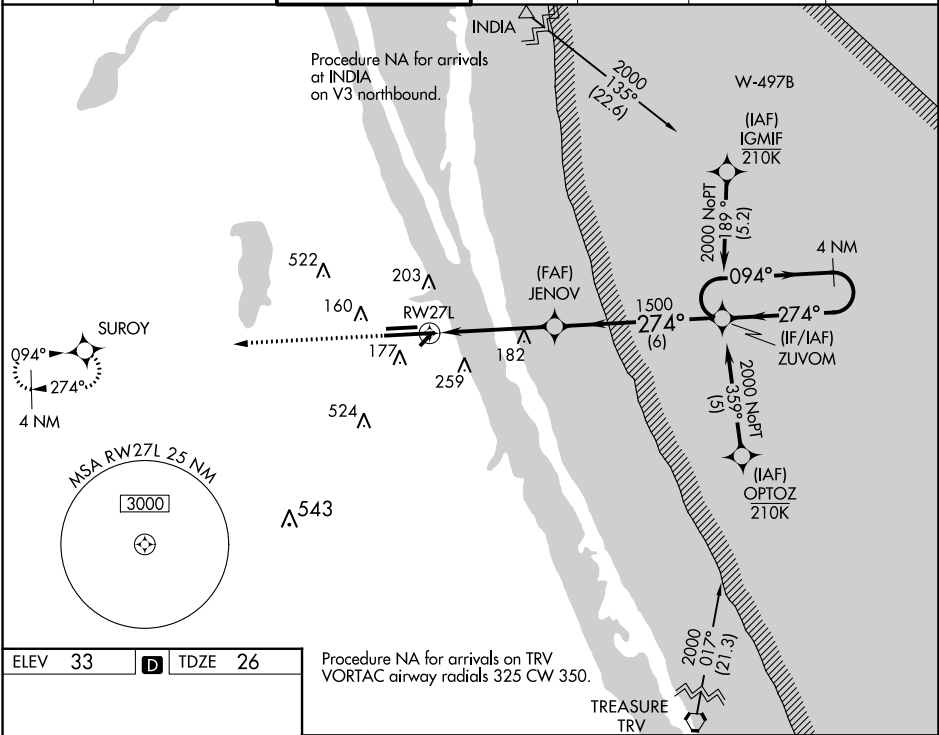

2000

↑

SUROY

✦

*LNAV only.

1.3 NM

to RW27L

1.3

3.2 NM

6 NM

RW27L

JENOV

1500

274°

1500

ZUVOM

4 NM Holding Pattern

094°

274°

2000

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
LPV DA	226-¾		200 (200-¾)	
LNAV/VNAV DA	318-⅞		292 (300-⅞)	
LNAV MDA	500-1 474 (500-1)		500-1⅜ 474 (500-1⅜)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)