V

NC-3,

13 JUL 2023 to


10 AUG 2023

WAAS 8000 Rwy Idg APP CRS 1268 TDŹE CH 72933 319° Apt Elev 1268 W32A

## RNAV (GPS) RWY 32 SPRINGFIELD-BRANSON NTL (SGF)

Baro-VNAV and VDP NA when using Monett altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Monett altimeter setting and increase all DA 90 feet and all MDA 100 feet; increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats 3/8 mile, LNAV Cats C and D ½ mile and Circling Cat C ¼ mile and Cat D ½ mile. DME/DME RNP- 0.3 NA.

MISSED APPROACH: Climb to 3000 direct JOGPU and hold.

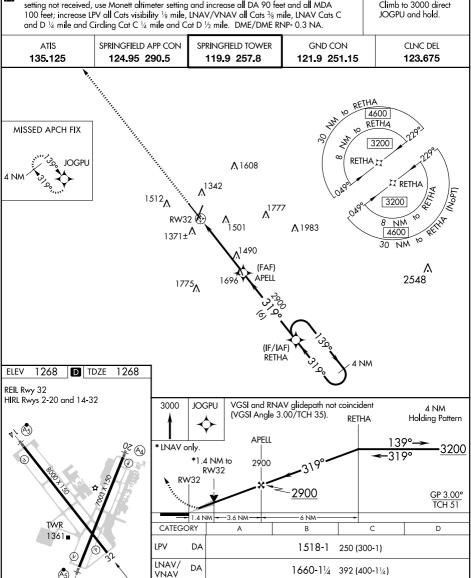

472 (500-1%)

1920-2

652 (700-2)

1740-1%

1820-11/2

552 (600-11/2)

1760-1

492 (500-1)

LNAV MDA

**C** CIRCLING

3199

1740-1 472 (500-1)

1820-1

552 (600-1)