


WAAS CH 50408 W17A	APP CRS 175°	Rwy Idg 7201 TDZE 1004 Apt Elev 1009
--	------------------------	---

RNAV (GPS) RWY 17

PONCA CITY RGNL (PNC)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2700 direct ZULOT and hold.
<div><div>▼</div><div>▲</div></div> <div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.</div>	<div><div>AS</div><div>⋮</div></div>	

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

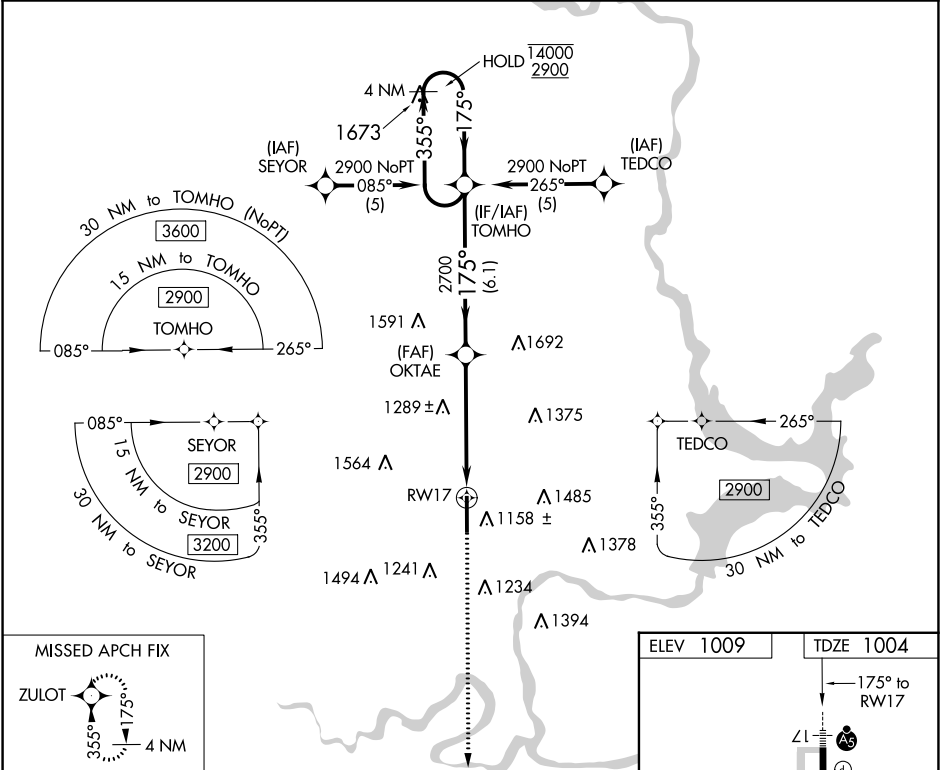

<div>4 NM Holding Pattern</div> <div>GP 3.00° TCH 48</div>				
<div>14000 2900 ← 355° 175° → 2700</div> <div>6.1 NM 3.6 NM 1.6 NM</div>				
CATEGORY	A	B	C	D
LPV DA	1279-½		275 (300-½)	
LNAV/VNAV DA	1330-½		326 (400-½)	
LNAV MDA	1540-½ 536 (600-½)		1540-1 536 (600-1)	
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)

