

WAAS CH <b>42832</b> <b>W20A</b>	APP CRS <b>203°</b>	Rwy Idg TDZE Apt Elev	<b>3996</b> <b>339</b> <b>342</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20  
CAPE GIRARDEAU RGNL (CGI)



RNP APCH-GPS.


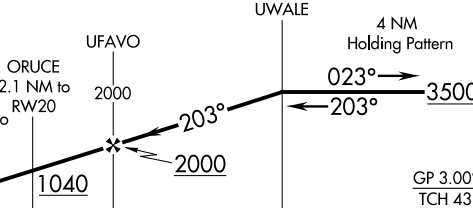

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 637 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet; increase LNAV and Circling visibility Cats C and D 1/4 SM. Rwy 20 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Cairo altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZUGUB and hold.

ASOS <b>120.55</b>	MEMPHIS CENTER <b>133.65 292.15</b>	CAPE GIRARDEAU TOWER ★ <b>125.525 (CTAF) 0</b>	GND CON <b>121.6</b>	UNICOM <b>122.95</b>
-----------------------	--	---	-------------------------	-------------------------

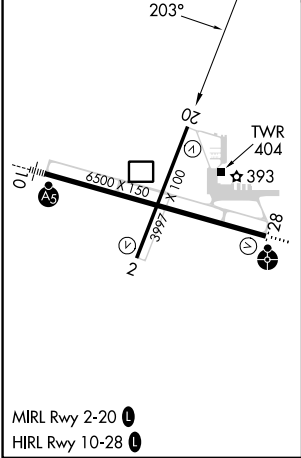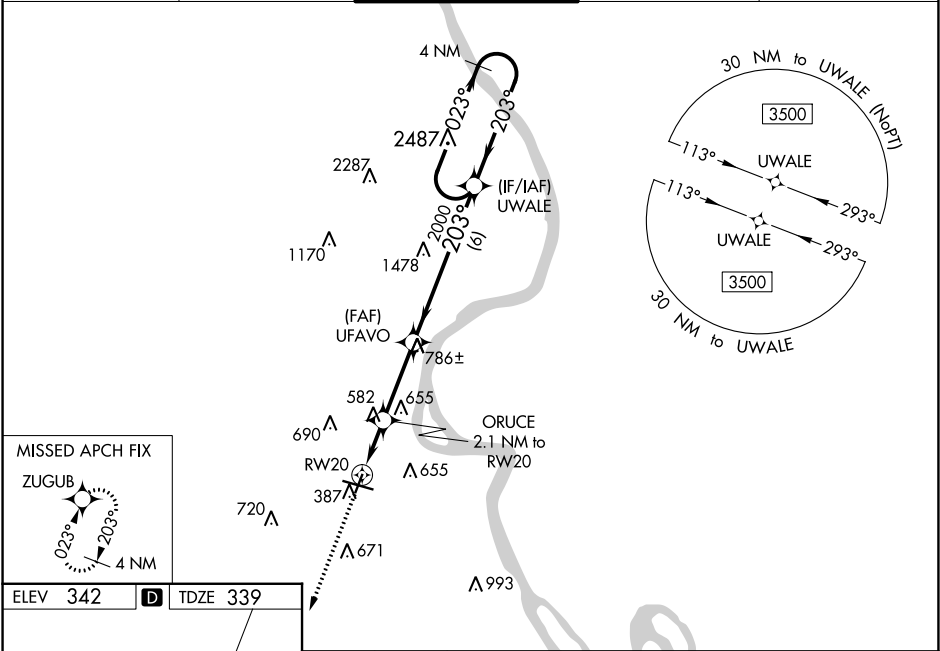

3000 ↑	ZUGUB 				
CATEGORY	A	B	C	D	
LPV DA	589-7/8 250 (300-7/8)				
LNAV/VNAV DA	604-7/8 265 (300-7/8)				
LNAV MDA	840-1	501 (500-1)	840-13/8	501 (500-13/8)	
 CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-13/4 658 (700-13/4)	1080-21/4 738 (800-21/4)	

NC-3, 13 JUL 2023 to 10 AUG 2023

NC-3, 13 JUL 2023 to 10 AUG 2023