Ŗ

15 JUN 2023

ō


10 AUG 2023

## RNAV (GPS) RWY 35 ANVIK (ANV)(PANV)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Holy Cross altimeter setting and increase all MDAs 120 feet and LNAV visibility Cat C/D % mile, and Circling visibility Cat D ½ mile.

MISSED APPROACH: Climbing right turn to 3700 direct ROBUE and hold, continue climb-in-hold to 3700.

AWOS-3P ANCHORAGE CENTER KENAI RADIO UNICOM
133.55 135.7 335.5 122.4 122.7 (CTAF) (

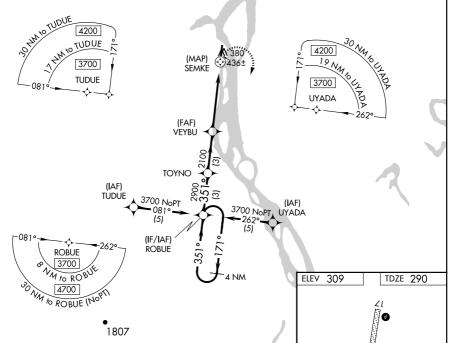

4 NM	ROBI	UE			3700	ROBUE	
Holding Pat	tern	TO	YNO				
1 3 /()()	71°		VEYE	BU	/	Y	
3	351° <del>→</del> ¯		2-				
		<u>2900</u>	3510		SEMKE		
1 2100 1							
Vocal did descent different Confident							
(VG3I Angle 3	.00/ ICH 25)	١.		TCH 35			
		-3 NM →	3 NM	5 NM —	- 0.5		
CATEGORY	A		В	С		D	
LNAV MDA	780-1 490 (500-1)			780-13/8 490 (500-13/8)			
CIRCLING	840-1 543 (600-1)			840-1½	1	860-2	

MIRL Rwy 17-35 ()
REIL Rwys 17 and 35 ()

ANVIK (ANV)(PANV)

RNAV (GPS) RWY 35

ANVIK, ALASKA Orig-A 26MAY16 543 (600-11/2)

563 (600-2)