RNP APCH


WAAS 5000 Rwy Idg TDZE APP CRS CH **42935** 605 040° W04A Apt Elev 615

RNAV (GPS) RWY 4

SILER CITY MUNI (SCR)

MISSED APPROACH: Climb to 3000 direct OPUXY and hold.

Procedure NA at night. Rwy 4, 22 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Asheboro Rgnl altimeter setting: increase all MDA 60 feet, increase LP and Circling Cat C visibilities ¼ SM, and increase LNAV Cat C visibility ½ SM. UNICOM GREENSBORO APP CON 125.775 126.6 327.075 122.7 (CTAF) (2649

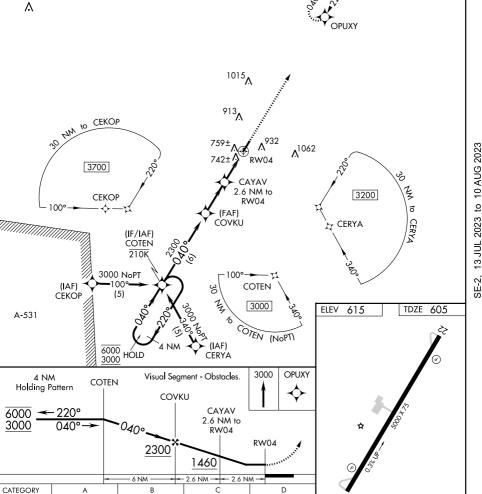

SILER CITY, NORTH CAROLINA Orig-B 28FEB19

1000-1

1020-1

1240-1

395 (400-1)

415 (500-1)

625 (700-1)

MDA

LNAV MDA

CIRCLING

SILER CITY MUNI (SCR) RNAV (GPS) RWY 4

040° to

RW04

REIL Rwys 4 and 22 1

MIRL Rwy 4-22 0

1000-11/8

395 (400-1%)

1020-11/4

415 (500-11/4) 1240-134

625 (700-13/4)

NA

NA

NA