

▼


▲

NA

Baro-VNAV NA. Circling Rwy 13, 31 NA at night. DME/DME RNP-0.3 NA. Use Lubbock altimeter setting. When not received, use Seminole altimeter setting and increase LPV DA to 3600; increase LNAV/VNAV DA to 3600; and increase all MDA 20 feet.

MISSED APPROACH: Climb to 5200 direct LEBDE and hold.

LBB ASOS 125.3	LUBBOCK APP CON 119.2 351.8	UNICOM 122.8 (CTAF) 0
-------------------	--------------------------------	--------------------------

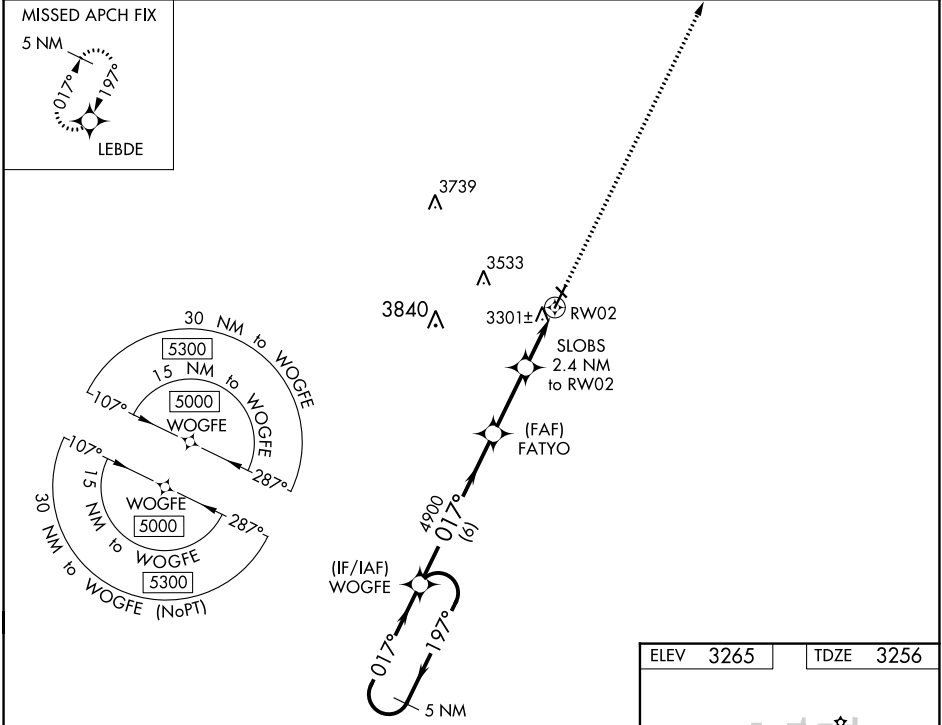

5 NM Holding Pattern		WOGFE		FATYO		SLOBS		RW02	
5000		197°		017°		017°		017°	
GP 3.00°		TCH 43		4900		4060		5200	
6 NM		2.6 NM		2.4 NM		2.4 NM		LEBDE	
CATEGORY		A		B		C		D	
LPV DA		3589-1		333 (400-1)					
LNAV/VNAV DA		3589-1		333 (400-1)					
LNAV MDA		3640-1		384 (400-1)		3640-1 1/8		384 (400-1 1/8)	
CIRCLING		3760-1		3920-1		3980-2		4100-2 3/4	
		495 (500-1)		655 (700-1)		715 (800-2)		835 (900-2 3/4)	

ELEV 3265

TDZE 3256