

22363




For inop ALS, increase RNP 0.30* all Cats visibility to % SM. Missed approach requires RNP less than 1.0.

to UBEVE and track 007° to QUIRT and track 088° MALS to DNW VOR/DME and hold, continue climb-in-hold to 14000 * Missed approach requires minimum climb of 330 feet

per NM to 8200; if unable to meet climb gradient, see RNAV (RNP) Y RWY 1. JACKSON TOWER* GND CON SALT LAKE CENTER UNICOM 120,625 133.25 285.6 118.075 (CTAF) (124.55 122.95

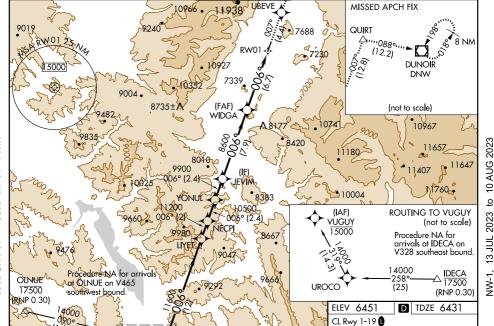

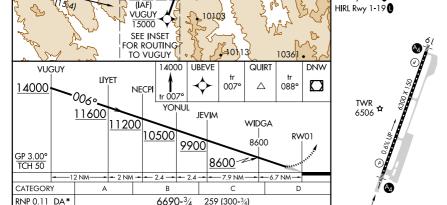

6743-3/4

AUTHORIZATION

JACKSON, WYOMING Amdt 1 13SEP18

RNP 0.30 DA*

JACKSON HOLE (JAC) RNAV (RNP) Z RWY 1

006°

312 (300-3/4)