WAAS CH 82426 W18A	APP CRS 182°	Rwy ldg 7000 TDZE 476 Apt Elev 476

RNAV (GPS) RWY 18
CLARK RGNL (JVY)

RNP APCH.

Circling NA for Cat D southwest of Rwys 14 and 36. Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Louisville Muhammad Ali Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 1 SM. When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting: increase all DA 30 feet and LNAV/VNAV visibility ⅛ SM; increase all MDAs 40 feet, LNAV visibility Cats C and D ⅛ SM and Circling visibility Cat C ¼ SM. For inop ALS when using Louisville Muhammad Ali Intl altimeter setting, increase LNAV/VNAV visibility to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 3100 direct EATTN and hold.

AWOS-3	LOUISVILLE APP CON	CLNC DEL	UNICOM
118.575	132.075 327.0	118.05	122.7 (CTAF) L

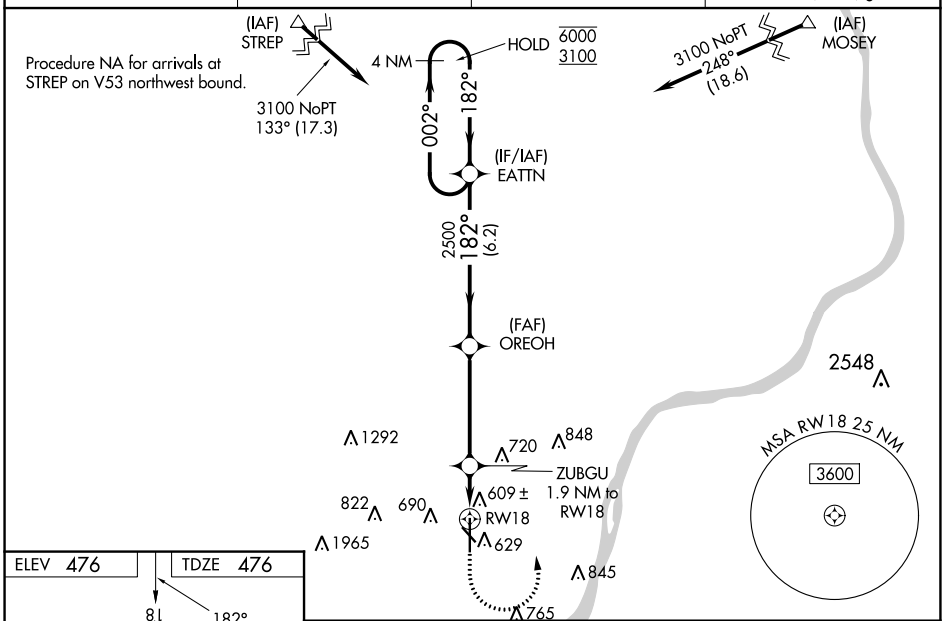

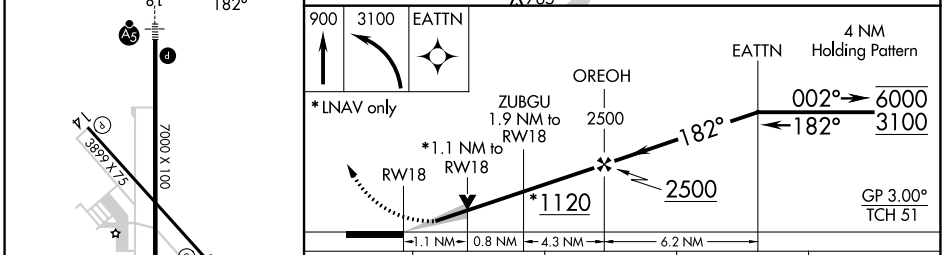

REIL Rwys 14 and 32
REIL Rwys 18 and 36 L
MIRL Rwys 14-32 and 18-36

CATEGORY	A	B	C	D
LPV DA	676-½ 200 (200-½)			
LNAV/VNAV DA	850-⅝ 374 (400-⅝)			
LNAV MDA	860-½ 384 (400-½)		860-⅝ 384 (400-⅝)	
C CIRCLING	1000-1 524 (600-1)	1040-1 564 (600-1)	1060-1½ 584 (600-1½)	1100-2 624 (700-2)

EC-2, 13 JUL 2023 to 10 AUG 2023
EC-2, 13 JUL 2023 to 10 AUG 2023