WAAS CH 63135 W32A	APP CRS 323°	Rwy ldg 4400 TDZE 1800 Apt Elev 1800

RNAV (GPS) RWY 32

SMITH CENTER MUNI (K82)

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Concordia altimeter setting and increase all DA 169 feet and all MDA 180 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ½ SM, Circling Cat A visibility ¼ SM and Circling Cat B visibility ½ SM. Baro-VNAV and VDP NA with Concordia altimeter setting. Circling Rwy 36 NA at night.

MISSED APPROACH: Climb to 3900 direct LAYIP and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.45	119.4 278.8	122.8 (CTAF) L

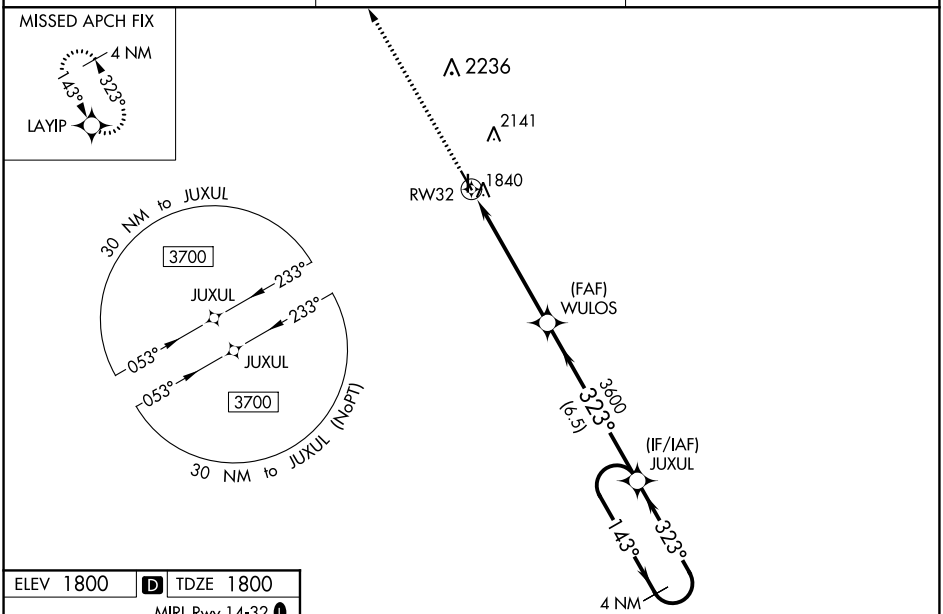

ELEV 1800 | D | TDZE 1800

MIRL Rwy 14-32 L

REIL Rwys 14 and 32 L

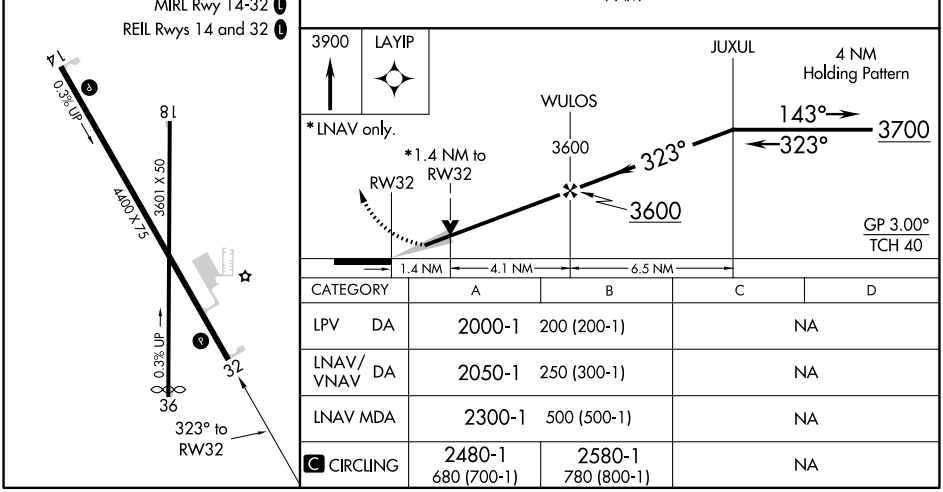

CATEGORY	A	B	C	D
LPV DA	2000-1 200 (200-1)		NA	
LNAV/VNAV DA	2050-1 250 (300-1)		NA	
LNAV MDA	2300-1 500 (500-1)		NA	
C CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

NC-2, 13 JUL 2023 to 10 AUG 2023
NC-2, 13 JUL 2023 to 10 AUG 2023