

WAAS CH <b>73014</b> <b>W03A</b>	APP CRS <b>034°</b>	Rwy Idg <b>5999</b> TDZE <b>624</b> Apt Elev <b>625</b>
--	------------------------	---

RNAV (GPS) RWY 3  
MENOMINEE RGNL (MNM)


RNP APCH.

**⚠** Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Sturgeon Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Sturgeon Bay altimeter setting and increase all DA/MDA 60 feet, increase Circling Cat C/D visibility ½ SM. For Inop MALSR when using Sturgeon Bay altimeter setting increase LNAV MDA visibility Cat C/D to 1 ½. Inop table does not apply to LPV and LNAV/VNAV all Cats and LNAV MDA Cats A/B.

MALSR



AWOS-3PT <b>121.45</b>	GREEN BAY APP CON ★ <b>120.3 338.2</b>	UNICOM <b>122.8 (CTAF) 0</b>
---------------------------	---	---------------------------------

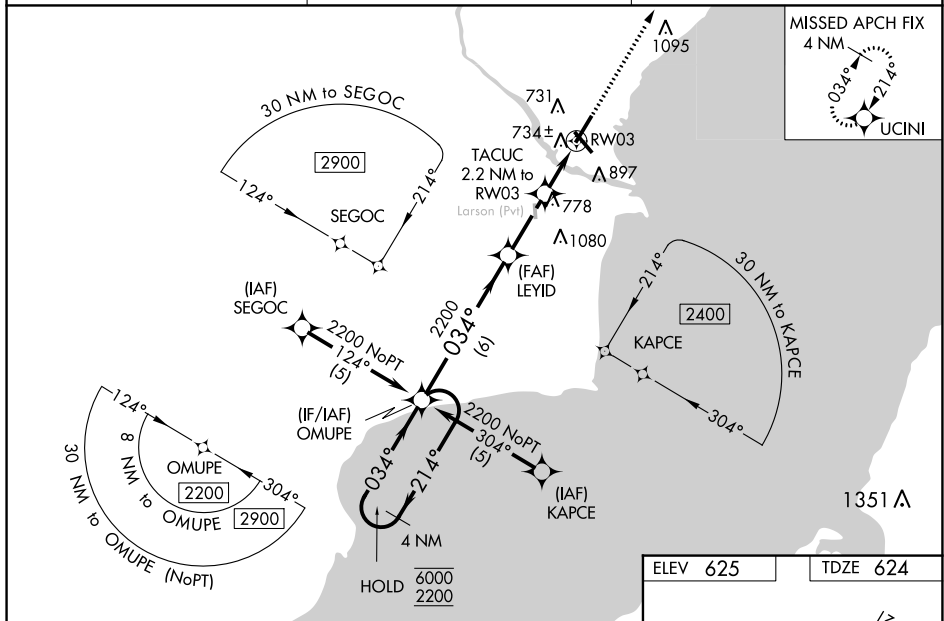

4 NM Holding Pattern

OMUPE

LEYID 2200

TACUC 2.2 NM to RW03

2200

214°

034°

034°

2200

GP 3.00° TCH 49

6 NM

2.6 NM

1.1

1.1

\*1360

\*1.1 NM to RW03

RW03

\*INAV only

UCINI

