

WAAS CH <b>69419</b> <b>W13A</b>	APP CRS <b>136°</b>	Rwy Idg TDZE <b>1140</b> Apt Elev <b>1140</b>
--	------------------------	---

RNAV (GPS) RWY 13

LITCHFIELD MUNI (LJF)

RNP APCH - GPS.

▼


Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54° C. Visibility reduction by helicopters

▲

NA. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1436 feet; increase LNAV/VNAV DA to 1980 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.

MISSED APPROACH:  
Climb to 2800 direct  
ANIML and hold.

AWOS-3 <b>119.65</b>	MINNEAPOLIS CENTER <b>125.5 323.1</b>	CTAF <b>122.9 0</b>
-------------------------	--	------------------------

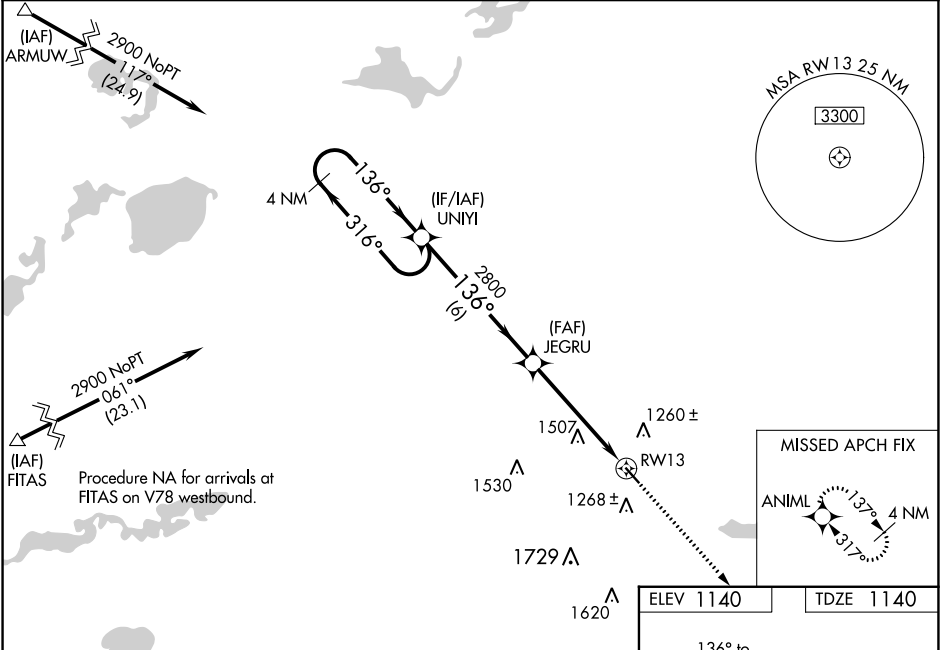

4 NM Holding Pattern		UNYI	2800	ANIML
2900 ← 316°		→ 136°	136°	
GP 3.00°			2800	
TCH 39				
		6 NM	3 NM	2 NM
CATEGORY	A	B	C	D
LPV DA	1390-1 250 (300-1)			
LNAV/VNAV DA	1934-2¾ 794 (800-2¾)			
LNAV MDA	1820-1	680 (700-1)	1820-2 680 (700-2)	1820-2¼ 680 (700-2¼)
CIRCLING	1820-1	680 (700-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)

